

A


B

C


D

Connector DB9
Female Skt
Pin Out

| Pos. | Color | Function |
|------|--------|---------------|
| 1 | Orange | CAN Hi |
| 2 | Red | Receive Data |
| 3 | Orange | Transmit Data |
| 4 | n/a | |
| 5 | Green | Signal Ground |
| 6 | Black | CAN Lo |
| 7 | n/a | |
| 8 | n/a | |
| 9 | Red | CAN (+V) Out |

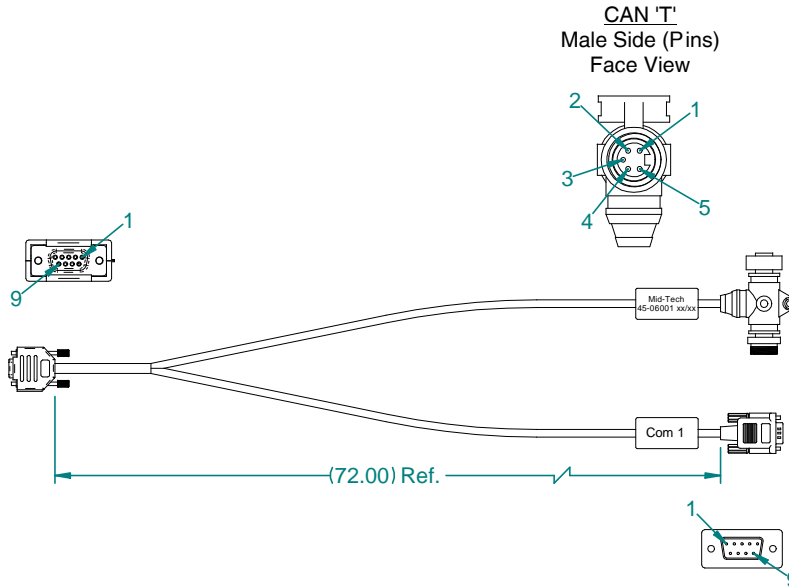

CAN 'T'
Male Side (Pins)
Face View






CAN "T"
5 Position

| Position | Color | Function |
|----------|--------|--------------|
| 1 | White | CAN Shield |
| 2 | Red | CAN (+V) Out |
| 3 | Green | CAN Ground |
| 4 | Orange | CAN High |
| 5 | Black | CAN Low |

Com 1
DB-9 w/Pins
Pin Out

| Pos. | Color | Function |
|------|--------|---------------|
| 1 | n/a | |
| 2 | Red | Receive Data |
| 3 | Orange | Transmit Data |
| 4 | n/a | |
| 5 | Green | Signal Ground |
| 6 | n/a | |
| 7 | n/a | |
| 8 | n/a | |
| 9 | n/a | |

Note: 1.0 All dimensions are displayed in "Inches",
Unless otherwise specified.

| | | | | | |
|---|---------|---|--------|--|--|
| MATERIAL: | | n/a | |  | |
| FINISH: | | n/a | | | |
| PROJECTION: | | SCALE: | UNITS: | TITLE: | |
|  | | 1:4 | X | Cable, Legacy 2000 | |
| UNLESS OTHERWISE SPECIFIED TOLERANCE: | | INCH METRIC: | | DRAWN BY: | |
| 0-1" +/- .1" 10-60" +/- .1" XX 1-5" +/- .25" 60-120" +/- .2" XXX 5-10" +/- .5" 120" +/- .3" Z | |  | | DRAWN BY: <i>Bryan Reeves</i> CHECKED BY: <i>Anna Trubner</i> | |
| R1 | 6/20/03 | 10253 | | APPROVED BY: <i>Anna Trubner</i> | |
| R0 | 3/3/03 | 010188 | | SHEET No: 1 of 1 DWG No: C-45-06001 | |
| REV. | DATE | DOC. No. | | Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed hereon. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC. | |