

A


B

C

D

PSM  
Metripack 30 pos.


Position	Color	Function
A1	Red	CAN (+V) Out
A2	Orange	CAN High
A3	Black	CAN Low
B1	Green	CAN Ground
B2	White	CAN Shield
B3	n/a	
C1	n/a	
C2	n/a	
C3	n/a	
D1	n/a	
D2	n/a	
D3	n/a	
E1	n/a	
E2	n/a	
E3	n/a	
F1	White	Freq. 1 Input
F2	n/a	
F3	n/a	
G1	Red	(+12v) Speed
G2	Black	Ground
G3	n/a	
H1	n/a	
H2	Black	Bat. Ground InPut
H3	n/a	
J1	White	Ignition Sense
J2	n/a	
J3	n/a	
K1	Red	Bat. (+V) InPut
K2	n/a	
K3	n/a	

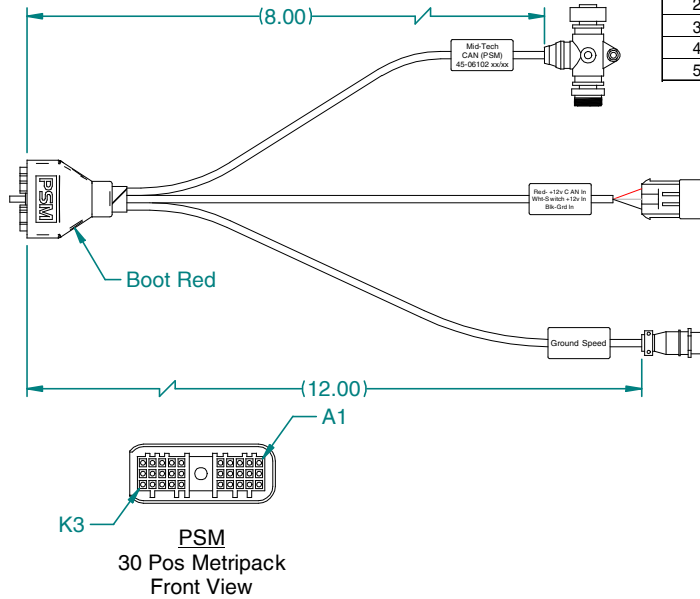

CAN 'T'  
5 pos.

Position	Color	Function
1	White	CAN Shield
2	Red	CAN (+V) Out
3	Green	CAN Ground
4	Orange	CAN High
5	Black	CAN Low

CAN 'T'  
Male Side (Pins)  
Face View



Power  
Metri-Pak 3 Pos.

Position	Color	Function
A	Red	(+V) Input
B	White	Ignition Sense
C	Black	Bat. Ground InPut

Ground Speed  
Amp 4 Pos

Position	Color	Function
1	Black	Ground
2	White	Freq. 1 Input
3	Red	(+12v) Speed
4	n/a	

Note: 1.0 All dimensions are displayed in "Inches" unless otherwise specified.

MATERIAL: See Notes		Midwest Technologies Illinois	
FINISH: N/A		TITLE: Cable, PSM Speed Plus Combined Power	
PROJECTION:	SCALE: 1:4	UNITS: X	DRAWN BY: Bryan Reiser
UNLESS OTHERWISE SPECIFIED TOLERANCE:		METRIC: X	CHECKED BY: Amy Neuber
0-1" +/- .1"	10-60" +/- 1"	XX	APPROVED BY: Scott Leuber
1-5" +/- .25"	60-120" +/- 2"	XXX	SHEET No: 10f1
5-10" +/- .5"	120" +/- 3"	Z	DWG No: C-45-06102
REV. DATE	NO. No	Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed hereon. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC.	

1

2

3

4