

A

B


C

D

1

Framatome 8 Pin
Connector w/Collar
& 18-16ga Pins
Pin Out
A-Wht 18/3 - TX
B-Red 18/3 - RX
C-Blk 18/3 - Gnd
D-N.C.
E-N.C.
F-Brn 18ga - Gnd Prt
G-Wht 18ga - +12V Prt
H-N.C.

DB9 Female 9 Socket
Connector & Black
Backshell
Pin Out
1-N.C.
2-Wht 18/3 - TX Ctrl
3-Red 18/3 - RX Ctrl
4-Red 1" - Jump to 6
5-Blk 18/3 - Gnd
6-Red 1" - Jump to 4
7-Red 1" - Jump to 8
8-Red 1" - Jump to 7
9-N.C.

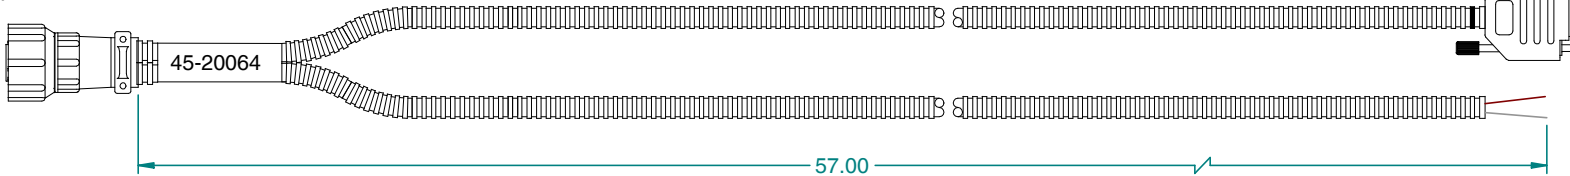

2



3

Stripped 18ga Wires
Brn -Fram Conn Pin F - Gnd
Wht-Fram Conn Pin G - +12V

4

Notes:

- 1.0 Cables: 18 & 20ga Stranded Wires
- 2.0 Conductors: Stranded Tinned Copper
- 3.0 Insulation: Color-Coded Polyvinylchloride

MATERIAL:		N/A			
FINISH:		N/A			
PROJECTION:		SCALE:	UNITS:	TITLE: 45987 Cable, Printer/Comm. w/ Pwr	
		1:2	X	DRAWN BY: J.D. Martie	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		METRIC:		CHECKED BY: Amy Henshaw	
0-1" +/- .1"	N/A	10-60" +/- .1"	N/A	APPROVED BY: <i>[Signature]</i>	
1-5" +/- .25"	X	60-120" +/- .2"	N/A	SHEET No:	DWG No:
5-10" +/- .5"	N/A	120" +/- .3"	N/A	1 of 1	C-45-20064
<p>Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed herein. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC.</p>					