

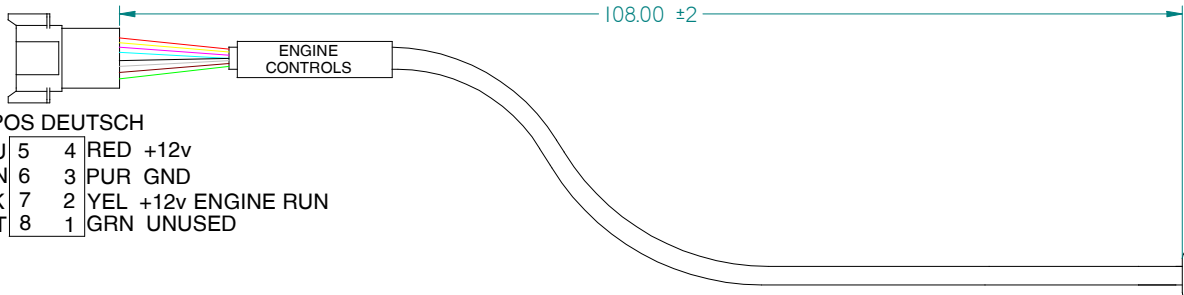


A | B | C | D

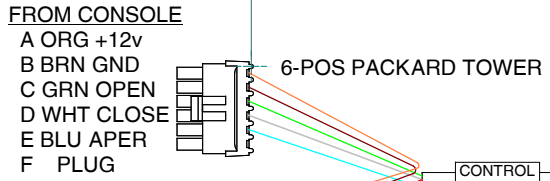

8-POS DEUTSCH

THROTTLE ADV. INC	BLU	5	4	RED	+12v
UNUSED	BRN	6	3	PUR	GND
THROTTLE ADV.	BLK	7	2	YEL	+12v ENGINE RUN
THROTTLE ADV. DEC	WHT	8	1	GRN	UNUSED





FROM CONSOLE

A	ORG	+12v
B	BRN	GND
C	GRN	OPEN
D	WHT	CLOSE
E	BLU	APER
F	PLUG	

TO VALVE

A	ORG	+12v
B	BRN	GND
C	RED	OPEN
D	BLK	CLOSE
E	BLU	APER
F	PLUG	

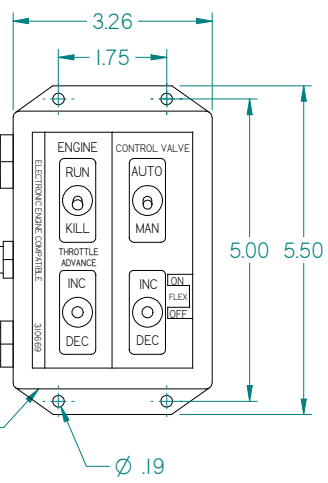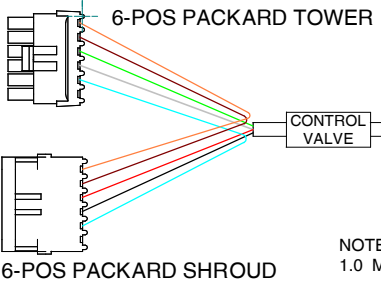

NOTES:
 1.0 MATERIALS:
 BOX - MATERIAL: AB S, BLACK
 FINISH: TEXTURED
 STRAIN RELIEFS-NYLON, WATER TIGHT
 2.0 CABLES:
 ENGINE CONTROLS CABLE - 8 COND. 18GA.
 FLEX CABLE - 2 COND. 18GA.
 CONTROL VALVE CABLE - 4 COND. 18GA
 DESCRIPTION:
 CONDUCTORS: STRANDED TINNED COPPER
 INSULATION: COLOR-CODED POLYVINYL CHLORIDE
 CONSTRUCTION: CONDUCTORS ARE CABLED
 JACKET: CHROME POLYVINYL CHLORIDE
 CHARACTERISTICS:
 TEMPERATURE RANGE: 10.5 deg. C
 VOLTAGE RATING: 300 VOLTS
 UL STYLE 2464

MATERIAL:		N/A		MID-TECH MIDWEST TECHNOLOGIES INC.	
FINISH:		N/A		TITLE: SWITCHBOX, TYLER LOAD "A"	
PROJECTION:		SCALE: UNITS: X		DRAWN BY: DAVE DANNER	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		1:2		CHECKED BY: Amy Newburn	
R1	12/14/99	99033-2	0-1" ±.1"	10-60" ±.1"	XX .02
R0	12/03/98	97352-2	1-5" ±.25"	60-120" ±.2"	XX
REV.	DATE	DOC. No.	5-10" ±.5"	120" ±.3"	Z
APPROVED BY: Diana Stewart					
				SHEET No:	DWG No:
				1 of 1	C-78-00007
MIDWEST TECHNOLOGIES INC. CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL DISCLOSED HEREON. THIS DOCUMENT IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF MIDWEST TECHNOLOGIES INC.					

1

2

3

4