


A

B





C

D

YELLOW

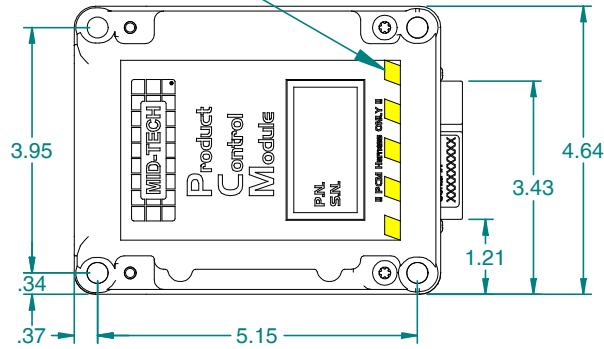

Pin	Function	Pin	Function
A1	CAN +V Out	F1	Valve Open
A2	CAN Hi	F2	Serial In
A3	CAN Lo	F3	Sensor Ground
B1	CAN Ground	G1	Valve Close
B2	CAN Shield	G2	Serial Out
B3	Sensor Ground	G3	Resis ID Input (A/D)
C1	Sensor Ground	H1	Batt Ground Out
C2	Sensor Ground	H2	Batt Ground Input
C3	Sensor F Input (A/D)	H3	Sensor C Input
D1	Sensor A Input	J1	Vlv +V (Batt Switch)
D2	Sensor B Input	J2	Batt Ground Out
D3	Sensor E Input (A/D)	J3	Sensor D Input
E1	Sensor +V (PTC 1)	K1	Batt +V Input
E2	Sensor +V (PTC 2b)	K2	Batt +V (PTC 1 Out)
E3	Sensor +V (PTC 2a)	K3	PWM +

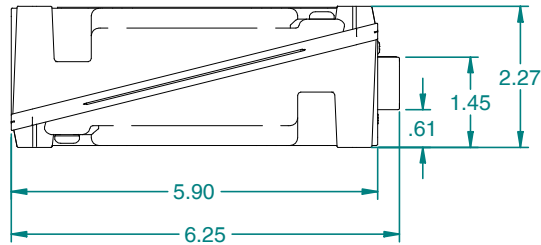

1:4

Notes:

- 1.0 All Dimensions Displayed in "Inches" Unless Otherwise Specified.
- 2.0 Form-Filled Seal. Do Not Open. Warranty Will Be Voided.

LED	LED Status	Message Or Meaning
CAN	Flashing	CAN communication in progress
PRG	Flashing	CAN module is functioning
PRG	Rapid Flashing	CAN module receiving software update
SW	ON/OFF	Status changes each time a boom switch is activated
MAG	N/A	Not Used
TXD	N/A	For production use only

MATERIAL:		N/A			
FINISH:		N/A			
PROJECTION:		SCALE: UNITS: INCH: X METRIC: X		TITLE: Module, PCM w/L6K Software	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		1:2		DRAWN BY: J.D. Martin	
R0 2/19/03 001070		0-1" +/- .1" 10-60" +/- 1" 3XX		CHECKED BY: Amy Robinson	
REV. DATE NDC No		1-5" +/- .25" 60-120" +/- 2" 3XX		APPROVED BY: Scott Leander	
		5-10" +/- .5" 120" +/- 3" 2		SHEET No: 1 of 1 DWS No:	
Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed herein. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC.					