



Now includes
Last Pass Guidance

MATRIX 908 FIELD COMPUTER

MATRIX[®] 908

RUGGED, EXPANDABLE, EASY TO USE

The Matrix[®] 908 Field Computer offers a wide range of capabilities and options to suit all precision farming needs. Whether you need guidance, application control, or both, this highly customizable platform gives you the features you need today, and into the future.


Matrix[®] 908 Features and Benefits

- High-contrast (1200 nits), high-resolution (1024x768), full-color 8.0 in/203 mm graphic touchscreen display provides responsive operation and excellent visibility, even in bright light conditions. Choice of background color schemes and adjustable brightness provides comfortable operation after dark as well
- Integrated dual constellation GNSS receiver with external antenna, supports a range of GNSS frequency and accuracy upgrades with no additional hardware (system unlock may be required)
- Compatible with external, third-party GNSS receivers
- Easy data transfer via USB
- New TwinView feature shows guidance and application control screens side-by-side
- Supports five unique guidance modes
- Internal and external boundary creation
- Supports UniPilot[®] Pro assisted steering
- Available ISO Universal Terminal (UT) task control for TeeJet liquid or dry systems. Compatible with full range of TeeJet IC series ISOBUS controllers
- Automatic section control supports up to 30-boom sections as a Guidance control, and up to 100-sections as ISOBUS UT
- VRA Prescription map support
- Records as-applied coverage maps for easy record keeping




RXA-52 ANTENNA

OPERATING SCREENS

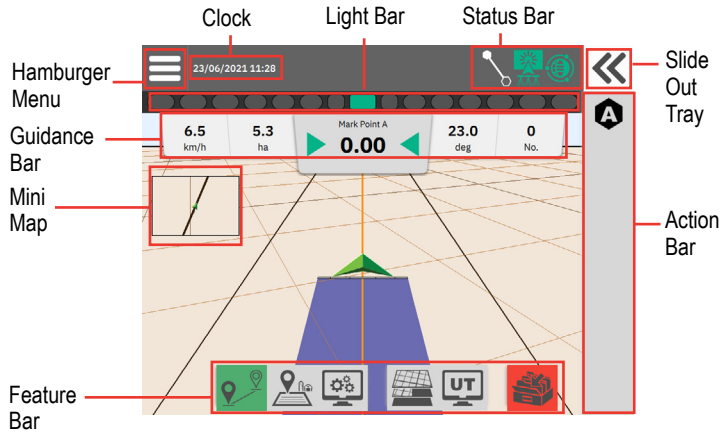

Guidance mode

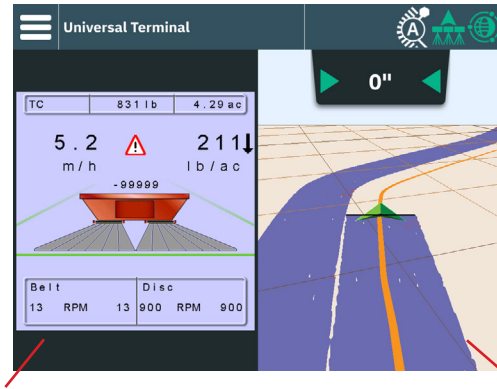

ISOBUS Rate Control

TwinView Mode

Guidance & Mapping (Last pass shown)

GNSS ACCURACY CHART

	SBAS	TerraStar-L*	TerraStar-C PRO*
Horizontal Accuracy (RMS)	23.6" (60 cm)	15.7" (40 cm)	1.0" (2.5 cm)
Horizontal Accuracy (95%)	47.2" (120 cm)	19.7" (50 cm)	1.2" (3.0 cm)
Pass-to-Pass Accuracy (95%)	~ 8" (~20 cm)	5.9" (15 cm)	0.8" (2.0 cm)
Convergence Time	N/A	< 5 min.	< 10 min.
Reconvergence Time	N/A	< 60 sec.	< 60 sec.

* Subscription Required



REAR VIEW OF MATRIX 908 CONSOLE

GUIDANCE MODES



Straight AB

Dynamic AB

Circle Pivot

A+ Azimuth

Last Pass

