


**HEAVY DUTY ADJUSTABLE
SPRAY GUN**

LATEST DESIGN INCORPORATES AN INTERNAL FLOW GUIDE-VANE RESULTING IN " BETTER-CONTROLLED " SOLID SPRAY STREAMS .. AND IN LONGER SPRAY THROWS FOR LARGER ORIFICE SIZES.

HARDENED STAINLESS STEEL INTERCHANGEABLE ORIFICE DISCS PROVIDE COMPLETE RANGE OF CAPACITIES AND SPRAY THROWS- WITH EXCEPTIONAL WEAR RESISTANCE. COMPLETE CONTROL OF SPRAY FROM "OFF" POSITION TO SOLID STREAM BY ONE COMPLETE TURN OF HANDLE.

SETTING "A"
CONE SPRAY PATTERN

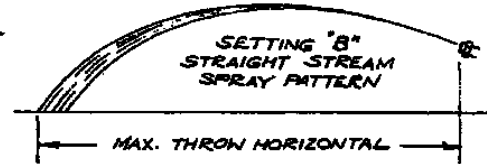

GUNJET NO.	DATA	LIQUID PRESSURE P.S.I. (Lbs. Per Sq. Inch)															
		40 P.S.I.		100 P.S.I.		200 P.S.I.		300 P.S.I.		400 P.S.I.		600 P.S.I.		800 P.S.I.			
		SETTING "A"	SETTING "B"	SETTING "A"	SETTING "B"	SETTING "A"	SETTING "B"	SETTING "A"	SETTING "B"	SETTING "A"	SETTING "B"	SETTING "A"	SETTING "B"	SETTING "A"	SETTING "B"		
143-2 D2-DISC	CAPACITY-G.P.M.	.23	.23	.36	.36	.51	.51	.63	.63	.73	.73	.89	.89	1.0	1.0		
	SPRAY ANGLE	15°	—	18°	—	17°	—	16°	—	15°	—	14°	—	14°	—		
	MAX. THROW-FT.	10	32	10	33	10	34	10 1/2	35	10 1/2	35	11	35	11	36		
	MAX. VERTICAL THROW-FT.	—	22	—	22	—	23	—	23	—	24	—	25	—	26		
143-4 D4-DISC	CAPACITY-G.P.M.	.52	.52	.82	.82	1.2	1.2	1.4	1.4	1.6	1.6	2.0	2.0	2.3	2.3		
	SPRAY ANGLE	25°	—	29°	—	27°	—	25°	—	23°	—	21°	—	20°	—		
	MAX. THROW-FT.	10	36	10	36	10 1/2	37	10 1/2	38	11	39	11	40	11	40		
	MAX. VERTICAL THROW-FT.	—	26	—	27	—	28	—	29	—	30	—	31	—	32		
143-6 D6-DISC	CAPACITY-G.P.M.	1.1	1.2	1.7	1.8	2.5	2.6	3.0	3.2	3.5	3.7	4.3	4.5	4.9	5.1		
	SPRAY ANGLE	38°	—	41°	—	37°	—	34°	—	33°	—	30°	—	28°	—		
	MAX. THROW-FT.	10	44	10	46	10 1/2	48	11	50	11	51	11	53	11	54		
	MAX. VERTICAL THROW-FT.	—	31 1/2	—	33	—	34 1/2	—	35 1/2	—	36 1/2	—	37 1/2	—	38		
143-8 D8-DISC	CAPACITY-G.P.M.	1.8	2.1	2.8	3.3	4.0	4.7	4.9	5.7	5.7	6.6	7.0	8.1	8.1	9.4		
	SPRAY ANGLE	48°	—	50°	—	48°	—	43°	—	42°	—	40°	—	36°	—		
	MAX. THROW-FT.	10	51	10	54	10 1/2	56	11	57	11	58	11	59	11	60		
	MAX. VERTICAL THROW-FT.	—	33	—	35 1/2	—	38	—	39 1/2	—	40 1/2	—	41	—	42		
143-10 D10-DISC	CAPACITY-G.P.M.	2.5	3.1	3.9	4.9	5.6	6.9	6.8	8.5	7.9	9.8	9.7	12	11.2	13.9		
	SPRAY ANGLE	50°	—	55°	—	51°	—	49°	—	45°	—	43°	—	40°	—		
	MAX. THROW-FT.	10	52	10 1/2	55	11	58	11 1/2	59	11 1/2	60	12	61	12	62		
	MAX. VERTICAL THROW-FT.	—	35	—	37 1/2	—	40	—	41 1/2	—	42 1/2	—	43 1/2	—	44 1/2		

DESCRIPTION:
NO. 143- _ GUNJETS



Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

10688

Ref.

SHEET OF