


**TK FLOODJET® WIDE ANGLE FLAT SPRAY TIPS
CAPACITIES TK-.50 THRU TK-1.5**



Data is based on spraying water under laboratory conditions using Aerometrics Phase Dopple Particle Analyzer (PDPA). All values are computed utilizing the procedures for determining spray characteristics as outlined by ASTM (Standard E799).

DESCRIPTION:
VOLUME MEDIAN PRESSURE (VMD)
VERSUS PRESSURE CURVES
SPRAYING WATER AT 70° F

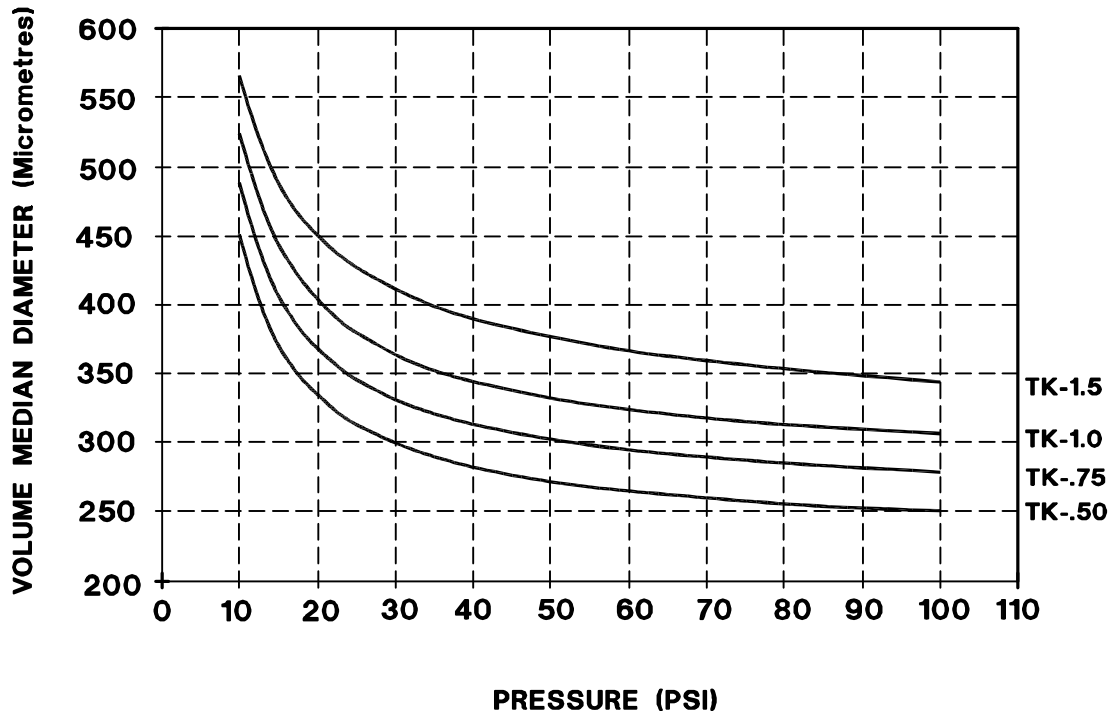

Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No. 1

Ref.

Data Sheet No.

11825-64

SHEET OF