


**TJ60-65 SERIES TWINJET® FLAT SPRAY TIPS  
CAPACITIES 650066VS THRU 6508VS  
(METRIC)**



**VOLUME MEDIAN DIAMETER (VMD)  
VERSUS PRESSURE  
SPRAYING WATER AT 21° C.**

Data is based on spraying water under laboratory conditions using the Aerometrics Phase Doppler Particle Analyzer (PDPA). All values are computed utilizing the procedures for determining spray characteristics as outlined by ASTM (Standard E799)

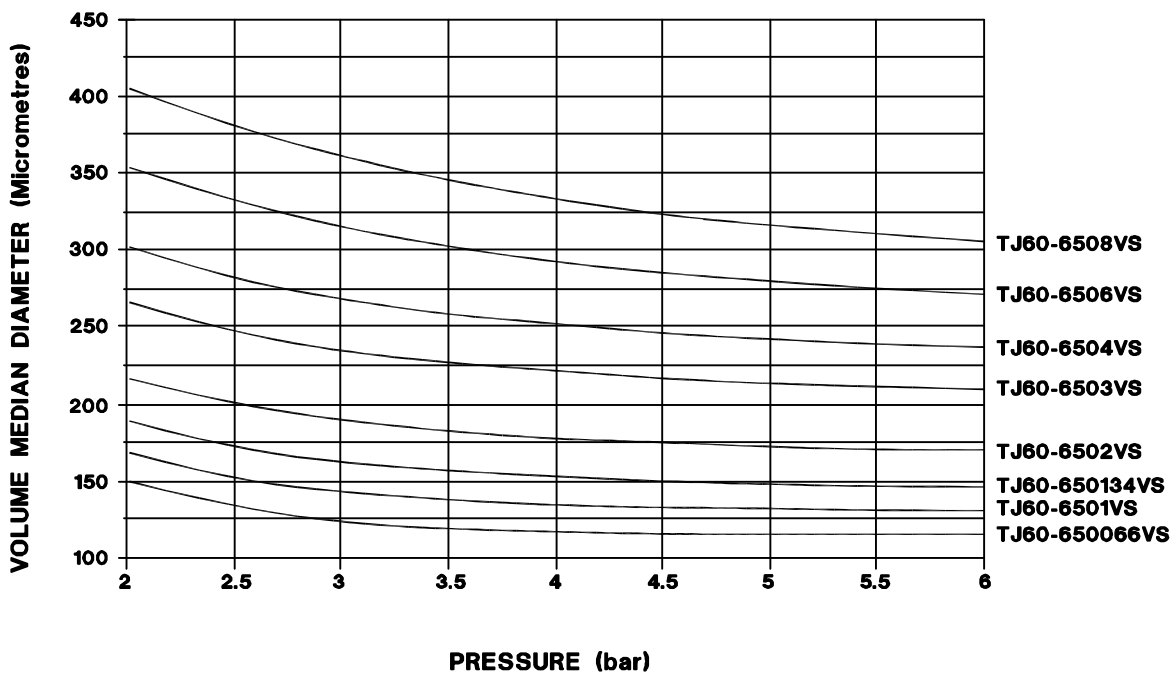

**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 • Wheaton, IL 60189-7900

Ref:

Rev. No.

Data Sheet No.

**11825-65M**