


**95° DRIFT GUARD EVEN VISIFLO®
STAINLESS STEEL FLAT SPRAY TIPS
CAPACITIES DG95015EVS THRU DG9505EVS
(METRIC)**



**VOLUME MEDIAN DIAMETER (VMD)
VERSUS PRESSURE
SPRAYING WATER AT 21° C.**

Data is based on spraying water under laboratory conditions using the Aerometrics Phase Doppler Particle Analyzer (PDPA). All values are computed utilizing the procedures for determining spray characteristics as outlined by ASTM (Standard E799)

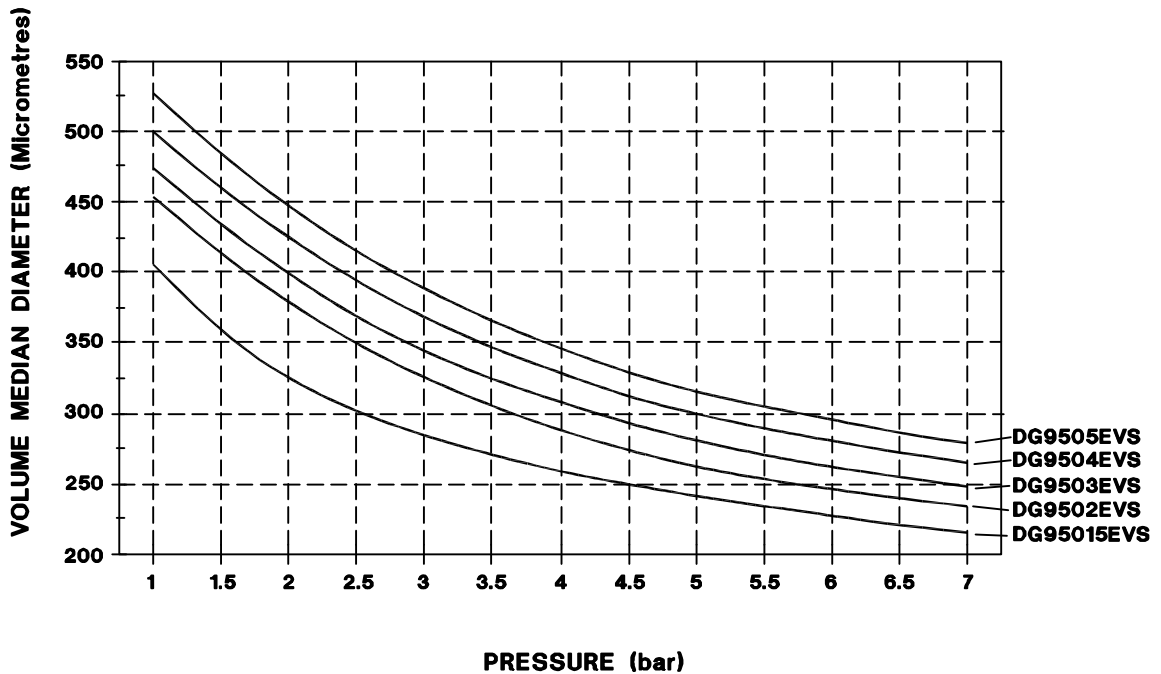

Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 • Wheaton, IL 60189-7900

Ref:

Rev. No.

Data Sheet No.

11825-69M