


ADJUSTABLE CONEJET® TIP No.	PERFORMANCE	LIQUID PRESSURE IN PSI (LBS. PER SQUARE INCH)											
		20 PSI		30 PSI		40 PSI		60 PSI		100 PSI		150 PSI	
		SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B
5500-X1	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.049 — 24.2	.015 38° 1.0	.061 — 27.6	.017 54° 1.5	.07 — 31.1	.02 71° 1.5	.086 — 29.9	.025 80° 1.5	.11 — 25.3	.028 83° 1.5	.14 — 18.14	
5500-X2	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.025 40° 1.5	.091 — 29.2	.03 60° 1.5	.11 — 32.1	.033 68° 2	.13 — 33.6	.04 75° 2	.16 — 32.8	.05 80° 2	.20 — 28.5	.058 83° 2	.25 — 21
5500-X3	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.037 57° 2	.13 — 31.3	.045 68° 2	.17 — 34.1	.05 72° 2	.19 — 35.4	.058 76° 2	.23 — 34.1	.073 80° 3	.30 — 30.1	.088 82° 3	.37 — 23.1
5500-X4	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.05 61° 2.5	.18 — 32.8	.058 70° 2.5	.22 — 35.9	.067 73° 3	.25 — 36.5	.08 77° 3	.31 — 35.1	.10 80° 3	.40 — 31.2	.12 81° 3	.49 — 24.9
5500-X5	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.061 61° 2.5	.21 — 33.87	.076 70° 2.5	.26 — 36.5	.082 74° 3	.30 — 37.1	.10 77° 3	.37 — 35.8	.13 80° 3	.48 — 31.7	.15 81° 3	.58 — 26.1
5500-X6	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.073 65° 2.5	.26 — 34.7	.087 71° 3	.32 — 37.3	.10 74° 3	.37 — 38.3	.12 77° 3.5	.45 — 36.5	.15 80° 3.5	.58 — 32.7	.19 80° 3.5	.71 — 27.7
5500-X8	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.097 66° 3	.33 — 35.9	.12 71° 3	.40 — 38.9	.13 74° 3	.47 — 39.8	.16 77° 3	.57 — 37.87	.21 80° 4	.74 — 34.6	.25 80° 4	.90 — 30
5500-X10	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.12 68° 3	.42 — 36.7	.15 72° 3.5	.52 — 39.7	.17 75° 3.5	.60 — 40.5	.21 78° 4	.73 — 38.9	.26 80° 4	.94 — 35.7	.31 80° 4	1.2 — 31.9
5500-X12	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.15 69° 3.5	.49 — 37.6	.18 73° 4	.60 — 40.8	.20 76° 4	.69 — 41.6	.24 78° 4	.84 — 40.2	.31 80° 4	1.1 — 37.5	.38 80° 4	1.3 — 33.5
5500-X14	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.17 70° 3.5	.55 — 38	.20 74° 4	.67 — 41.4	.23 76° 4	.78 — 42.6	.29 78° 4	.95 — 41.3	.37 80° 4.5	1.2 — 39.2	.45 80° 4.5	1.5 — 35.8
5500-X18	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.21 71° 4	.69 — 38.1	.26 75° 4	.84 — 42.1	.30 77° 4	.97 — 43.5	.37 78° 4	1.2 — 42.5	.47 80° 5	1.5 — 40.3	.58 79° 5	1.9 — 37.3
5500-X22	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.26 71° 4	.83 — 38.3	.32 75° 4.5	1.0 — 42.7	.37 78° 5	1.2 — 44.6	.45 79° 5	1.4 — 43.3	.58 80° 5	1.9 — 40.7	.70 78° 5	2.3 — 37
5500-X26	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.31 72° 4.5	.98 — 38.1	.37 76° 5	1.2 — 43	.43 78° 5	1.4 — 45	.53 79° 5.5	1.7 — 43.7	.68 80° 5.5	2.2 — 41.2	.83 78° 5.5	2.7 — 36.8

ABOVE DATA IS BASED ON SPRAYING WATER FROM A HEIGHT OF ABOUT 2 1/2 FEET...
WITH TIP TILTED ABOUT AS SHOWN AT RIGHT FOR EACH SETTING.

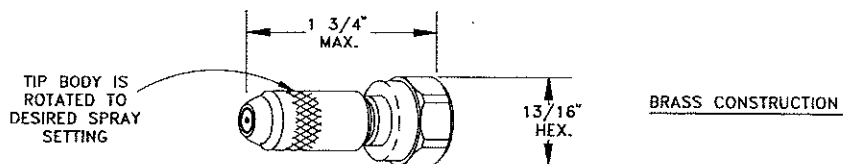


No. 5500-- ADJUSTABLE CONEJET TIP


ADJUSTABLE CONEJET® TIPS ARE SUPPLIED AS A TIP AND CAP ASSEMBLY
TO FIT ANY STANDARD TYPE T OR TT SPRAY NOZZLE BODY OR TRIGGER
VALVE SPRAY GUN, AS SHOWN BELOW.



No. 5500-- ADJUSTABLE CONEJET TIP
WITH TYPE T NOZZLE BODY

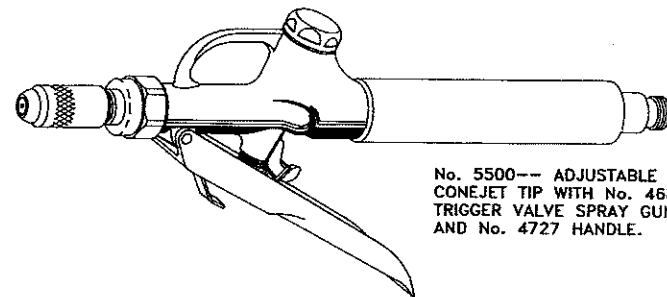

No. 5500-- ADJUSTABLE
CONEJET TIP WITH No. 4688
TRIGGER VALVE SPRAY GUN
AND No. 4727 HANDLE.

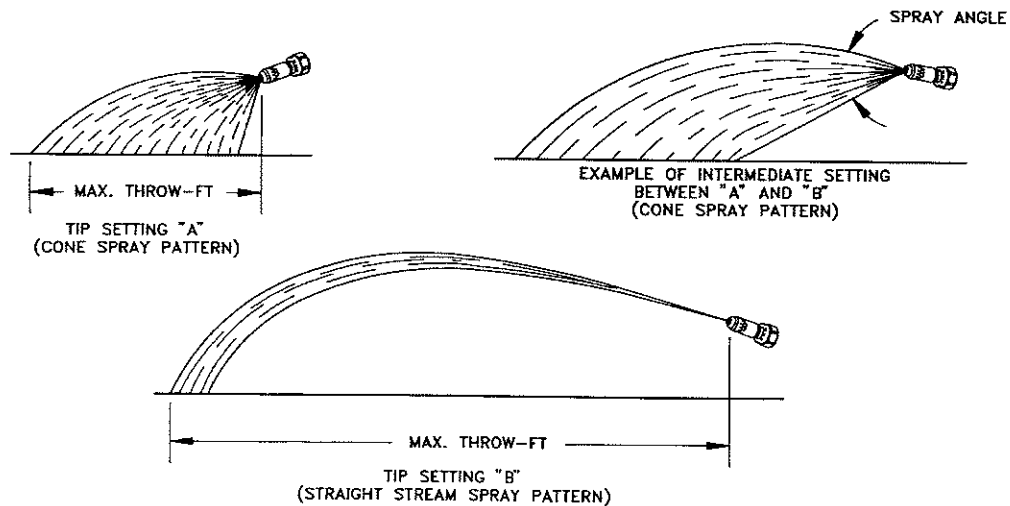

DESCRIPTION

No. 5500--
ADJUSTABLE CONEJET® TIP



Spraying Systems Co.

Spray Nozzles and Accessories

North Avenue at Schmale Rd. • P.O. Box 7900
Wheaton, Ill. 60189-7900

Ref:

Data Sheet No.

Revision No. 3

16039