




NO. 12795- LARGE CAPACITY THROTTLING VALVES
 THE NO. 12795-THROTTLING VALVES ARE DESIGNED FOR USE IN ALL APPLICATIONS WHERE METERING OF FLOW OF LIQUID IS REQUIRED.

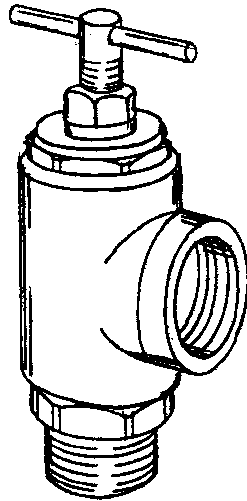

NO. 12795-1

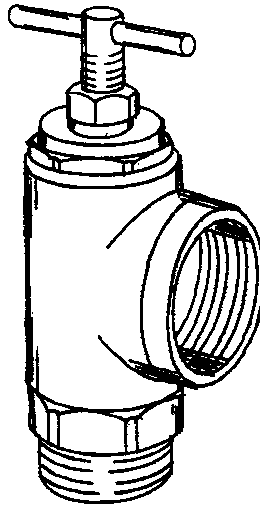

NO. 12795-1/4

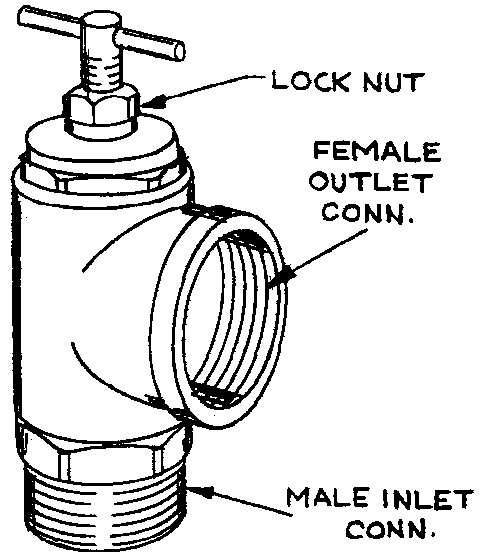

NO. 12795-1/2

CHOICE OF BRASS ... ALUMINUM ... AND DUCTILE IRON

FEATURES:

- MAXIMUM RECOMMENDED PRESSURE — 1000kPa
- REMOVABLE BONNET FOR SERVICING UNIT WITHOUT REMOVING VALVE FROM LINE.
- STEM LOCK NUT TO MAINTAIN ANY FLOW RATE SETTING.
- LONG TAPERED SEAT TO SMOOTHLY ADJUST DESIRED FLOW RATE.

MODEL NO.	INLET & OUTLET CONN. N.P.T.	MATERIAL	OVERALL LENGTH (APPROX.)
12795-1	1"	BRASS	140mm
12795-1/4	1/4"		146mm
12795-1/2	1/2"		146mm
12795-1-DI	1"	DUCTILE IRON	140mm
12795-1/4-DI	1/4"		146mm
12795-1/2-DI	1/2"		146mm
12795-1-AL	1"	ALUMINUM	140mm
12795-1/4-AL	1/4"		146mm
12795-1/2-AL	1/2"		146mm

FLOW RATES THROUGH VALVES — IN FULLY OPEN SETTING —					
LIQUID PRESSURE IN kPa		100	150	200	250
MAXIMUM FLOW RATE IN L/min.	1" & 1/4" SIZES	260	320	370	420
	1/2" SIZE	390	480	550	620

DESCRIPTION:

NO. 12795-LARGE CAPACITY THROTTLING VALVES (METRIC UNITS)



Spraying Systems Co.[®]

Spray Nozzles and Accessories
 P.O. Box 7900 - Wheaton, Il. 60187-7900

Rev. No.

Data Sheet No.

17954

Ref.

SHEET OF