


NO. 12328 LARGE CAPACITY DIAPHRAGM CHECK VALVES

THE 12328 CHECK VALVES ARE DESIGNED FOR USE WITH LARGE CAPACITY SPRAY NOZZLES - SUCH AS FIELDJETS AND FLOODJETS IN APPLYING FERTILIZER SOLUTIONS AND OTHER CHEMICALS TO PROVIDE QUICK SPRAY SHUT-OFF WHEN LINE PRESSURE IS SHUT-OFF, THEREBY PREVENTING LINE FROM DRAINING.

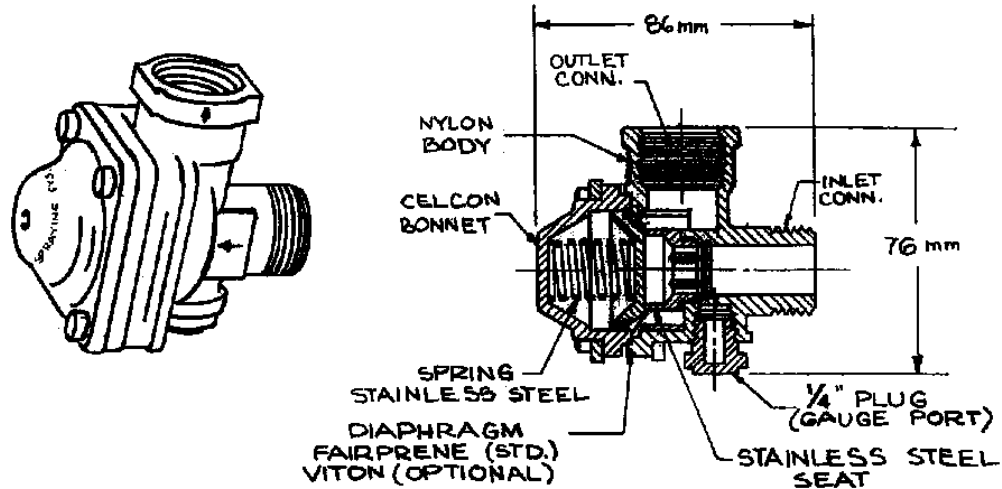

MATERIAL CONSTRUCTION - NYLON AND STAINLESS STEEL

DIAPHRAGM CHECK VALVE NO.	INLET CONN. N.P.T. (M)	OUTLET CONN. N.P.T. (F)
12328-1/2-NY	1/2"	1/2"
12328-3/4-NY	3/4"	3/4"

STANDARD OPENING PRESSURE - 50 kPa (APPROX)
 MAXIMUM RECOMMENDED OPERATING PRESSURE - 900 kPa

THE 12328 CHECK VALVES ARE ALSO AVAILABLE WITH INLET BODIES OF BRASS OR ALUMINUM ON SPECIAL ORDER BASIS.

FLOW RATE, L/min	20	28	40	60	80	100	120
PRESSURE DROP, kPa FOR 12328-1/2-NY	8	14	28	63	110	173	245
PRESSURE DROP, kPa FOR 12328-3/4-NY	4	7	15	33	58	92	133

DESCRIPTION:
 NO. 12328-LARGE CAPACITY DIAPHRAGM CHECK VALVES



Spraying Systems Co.®
 Spray Nozzles and Accessories
 P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No.

Data Sheet No.

17959

Ref.

SHEET OF