
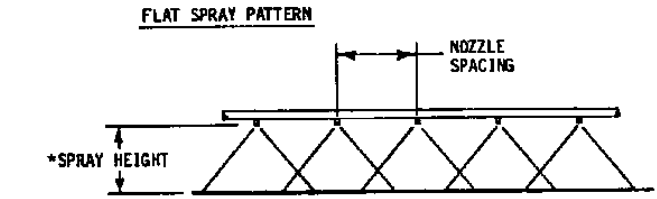


TIP NO. (STRAINER SCREEN SIZE)	LIQUID PRESS. PSI.	CAPACITY 1-NOZZLE G.P.M.	— GALLONS PER ACRE —											
			20" NOZZLE SPACING						30" NOZZLE SPACING					
			4 MPH	5 MPH	6 MPH	7 MPH	8 MPH	10 MPH	4 MPH	5 MPH	6 MPH	7 MPH	8 MPH	10 MPH
9501 (100 MESH)	20	.07	5.3	4.2	3.5	3.0	2.6	2.1	3.5	2.8	2.3	2.0	1.8	1.4
	30	.09	6.4	5.1	4.3	3.7	3.2	2.6	4.3	3.4	2.9	2.5	2.1	1.7
	40	.10	7.4	5.9	5.0	4.2	3.7	3.0	5.0	4.0	3.3	2.8	2.5	2.0
	50	.11	8.3	6.6	5.5	4.7	4.2	3.3	5.5	4.4	3.7	3.2	2.8	2.2
60	.12	9.1	7.3	6.1	5.2	4.6	3.6	6.1	4.9	4.0	3.5	3.0	2.4	
95015 (100 MESH)	20	.11	7.9	6.3	5.3	4.5	3.9	3.2	5.3	4.2	3.5	3.0	2.6	2.1
	30	.13	9.7	7.7	6.4	5.5	4.8	3.9	6.4	5.1	4.3	3.7	3.2	2.6
	40	.15	11.1	8.9	7.4	6.4	5.6	4.5	7.4	5.9	5.0	4.2	3.7	3.0
	50	.17	12.5	10.0	8.3	7.1	6.2	5.0	8.3	6.6	5.5	4.7	4.2	3.3
60	.18	13.4	10.9	9.1	7.8	6.8	5.5	9.1	7.3	6.1	5.2	4.6	3.6	
9502 (50 MESH)	20	.14	10.5	8.4	7.0	6.0	5.3	4.2	7.0	5.6	4.7	4.0	3.5	2.8
	30	.17	12.9	10.3	8.6	7.4	6.4	5.1	8.6	6.9	5.7	4.9	4.3	3.4
	40	.20	14.9	11.9	9.9	8.5	7.4	5.9	9.9	7.9	6.6	5.7	5.0	4.0
	50	.23	16.6	13.3	11.1	9.5	8.3	6.6	11.1	8.9	7.4	6.3	5.5	4.4
60	.25	18.2	14.6	12.1	10.4	9.1	7.3	12.1	9.7	8.1	6.9	6.1	4.9	
9503 (50 MESH)	20	.21	15.8	12.6	10.5	9.0	7.9	6.3	10.5	8.4	7.0	6.0	5.3	4.2
	30	.26	19.0	15.4	12.9	11.0	9.7	7.7	12.9	10.3	8.6	7.4	6.4	5.1
	40	.30	22	17.8	14.9	12.7	11.1	8.9	14.9	11.9	9.9	8.5	7.4	5.9
	50	.34	25	19.9	16.6	14.2	12.5	10.0	16.6	13.3	11.1	9.5	8.3	6.6
60	.37	27	22	18.2	15.6	13.6	10.9	18.2	14.6	12.1	10.4	9.1	7.3	
9504 (50 MESH)	20	.28	21	16.8	14.0	12.0	10.5	8.4	14.0	11.2	9.3	8.0	7.0	5.6
	30	.35	26	21	17.2	14.7	12.9	10.3	17.2	13.7	11.4	9.8	8.6	6.9
	40	.40	30	24	19.8	17.0	14.9	11.9	19.8	15.8	13.2	11.3	9.9	7.9
	50	.45	33	27	22	19.0	16.6	13.3	22	17.7	14.8	12.7	11.1	8.9
60	.49	36	29	24	21	18.2	14.6	24	19.4	16.2	13.9	12.1	9.7	
9505 (50 MESH)	20	.35	26	21	17.5	15.0	13.1	10.5	17.5	14.0	11.7	10.0	8.8	7.0
	30	.43	32	26	21	18.4	16.1	12.9	21	17.2	14.3	12.3	10.7	8.6
	40	.50	37	30	25	21	18.6	14.9	25	19.8	16.5	14.1	12.4	9.9
	50	.56	42	33	28	24	21	16.6	28	22	18.5	15.8	13.8	11.1
60	.61	45	36	30	26	23	18.2	30	24	20	17.3	15.2	12.1	
9506 (50 MESH)	20	.42	32	25	21	18.0	15.8	12.6	21	16.8	14.0	12.0	10.5	8.4
	30	.52	39	31	26	22	19.3	15.4	26	21	17.2	14.7	12.9	10.3
	40	.60	45	36	30	25	22	17.8	30	24	19.8	17.0	14.9	11.9
	50	.67	50	40	33	28	25	19.9	33	27	22	19.0	16.6	13.3
60	.74	55	44	36	31	27	22	36	29	24	21	18.2	14.6	
9508 (50 MESH)	20	.57	42	34	28	24	21	16.8	28	22	18.7	16.0	14.0	11.2
	30	.69	52	41	34	29	26	21	34	27	23	19.6	17.2	13.7
	40	.80	59	48	40	34	30	24	40	32	26	23	19.8	15.8
	50	.89	66	53	44	38	33	27	44	35	30	25	22	17.7
60	.98	73	58	49	42	36	29	49	39	32	28	24	19.4	
9510 (NO STRAINER)	20	.71	53	42	35	30	26	21	35	28	23	20	17.5	14.0
	30	.87	64	51	43	37	32	26	43	34	29	25	21	17.2
	40	1.00	74	59	50	42	37	30	50	40	33	28	25	19.8
	50	1.12	83	66	55	47	42	33	55	44	37	32	28	22
60	1.23	91	73	61	52	45	36	61	49	40	35	30	24	
9515 (NO STRAINER)	20	1.06	79	63	53	45	39	32	53	42	35	30	26	21
	30	1.30	97	77	64	55	48	39	64	51	43	37	32	26
	40	1.50	111	89	74	64	56	45	74	59	50	42	37	30
	50	1.68	125	100	83	71	62	50	83	66	55	47	42	33
60	1.84	136	109	91	78	68	55	91	73	61	52	45	36	
9520 (NO STRAINER)	20	1.41	105	84	70	60	53	42	70	56	47	40	35	28
	30	1.73	128	103	86	73	64	51	86	69	57	49	43	34
	40	2.00	149	119	99	85	74	59	99	79	66	57	50	40
	50	2.23	166	133	111	95	83	66	111	89	74	63	55	44
60	2.45	182	146	121	104	91	73	121	97	81	69	61	49	

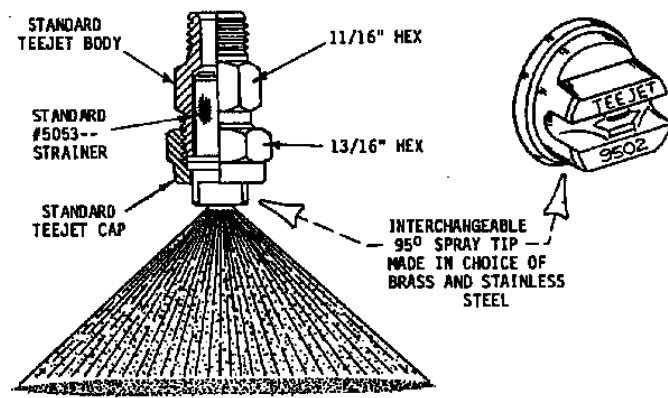

\*ADJUST SPRAY HEIGHT IN THE FIELD TO OVERLAP APPROXIMATELY 30% OF EACH EDGE OF PATTERN.

THE PERFORMANCE OF ANY AGRICULTURAL CHEMICAL DEPENDS UPON THE PROPER APPLICATION OF THE CORRECT AMOUNT. BE SURE THAT YOUR EQUIPMENT HAS BEEN PROPERLY CALIBRATED BEFORE SPRAYING.

TABULATION IS BASED ON SPRAYING WATER AT TEMPERATURE OF 70° F.

DESCRIPTION:  
GALLONS PER ACRE  
USING TEEJET NOZZLES WITH  
STANDARD 95 DEG. TEEJET TIPS



**Spraying Systems Co.**  
Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No.	Data Sheet No.
Ref.	20515 SHEET OF