


TWINJET™ TIP NO. AND STRAINER SCREEN SIZE	LIQUID PRESS. IN bar	CAPACITY IN l/min	LITERS PER HECTARE									
			50 cm NOZZLE SPACING					75 cm NOZZLE SPACING				
			6 km/h	8 km/h	10 km/h	12 km/h	16 km/h	6 km/h	8 km/h	10 km/h	12 km/h	16 km/h
TJ60-650134VS (100 MESH)	1.5	0.37	75	56	45	37	28	50	37	30	25	18.7
	2	0.43	86	65	52	43	32	58	43	35	29	22
	2.5	0.48	97	72	58	48	36	64	48	39	32	24
	3	0.53	106	79	63	53	40	71	53	42	35	26
3.5	0.57	114	86	69	57	43	76	57	46	38	29	
TJ60-6502VS (100 MESH)	1.5	0.56	112	84	67	56	42	74	56	45	37	28
	2	0.64	129	97	77	64	48	86	64	52	43	32
	2.5	0.72	144	108	86	72	54	96	72	58	48	36
	3	0.79	158	118	95	79	59	105	79	63	53	39
3.5	0.85	171	128	102	85	64	114	85	69	57	43	
TJ60-6503VS (100 MESH)	1.5	0.84	167	126	100	84	63	112	84	67	56	42
	2	0.97	193	145	116	97	73	129	97	77	64	48
	2.5	1.08	220	162	130	108	81	144	108	86	72	54
	3	1.18	240	178	142	118	89	158	118	95	79	59
3.5	1.28	260	192	153	128	96	171	128	102	85	64	
TJ60-6504VS (50 MESH)	1.5	1.12	220	167	134	112	84	149	112	89	74	56
	2	1.29	260	193	155	129	97	172	129	103	86	64
	2.5	1.44	290	220	173	144	108	192	144	115	96	72
	3	1.58	320	240	189	158	118	210	158	126	105	79
3.5	1.71	340	260	200	171	128	230	171	136	114	85	
TJ60-6506VS (50 MESH)	1.5	1.67	330	250	200	167	126	220	167	134	112	84
	2	1.93	390	290	230	193	145	260	193	155	129	97
	2.5	2.16	430	320	260	220	162	290	220	173	144	108
	3	2.37	470	360	280	240	178	320	240	189	158	118
3.5	2.56	510	380	310	260	192	340	260	200	171	128	
TJ60-11003VS (100 MESH)	1.5	0.84	167	126	100	84	63	112	84	67	56	42
	2	0.97	193	145	116	97	73	129	97	77	64	48
	2.5	1.08	220	162	130	108	81	144	108	86	72	54
	3	1.18	240	178	142	118	89	158	118	95	79	59
3.5	1.28	260	192	153	128	96	171	128	102	85	64	
TJ60-11004VS (50 MESH)	1.5	1.12	220	167	134	112	84	149	112	89	74	56
	2	1.29	260	193	155	129	97	172	129	103	86	64
	2.5	1.44	290	220	173	144	108	192	144	115	96	72
	3	1.58	320	240	189	158	118	210	158	126	105	79
3.5	1.71	340	260	200	171	128	230	171	136	114	85	

DIRECTION OF TRAVEL →

DIRECTION OF TRAVEL →



POST-EMERGE APPLICATION




PRE-EMERGE APPLICATION

- PROVIDES FRONT AND REAR SURFACE COVERAGE OF CROP OR WEED WITHOUT SACRIFICING UNIFORMITY.
- IDEAL FOR PROVIDING A PENETRATING, THOROUGH COVERAGE WITH POST-EMERGE HERBICIDES.
- GOOD PRE-EMERGE COVERAGE ON CLODDY FIELDS AND FIELDS COVERED WITH CROP RESIDUE.

TWINJET™ TIP NO. AND STRAINER SCREEN SIZE	LIQUID PRESS. IN bar	CAPACITY IN l/min	LITERS PER HECTARE									
			50 cm NOZZLE SPACING					75 cm NOZZLE SPACING				
			6 km/h	8 km/h	10 km/h	12 km/h	16 km/h	6 km/h	8 km/h	10 km/h	12 km/h	16 km/h
TJ60-11006VS (50 MESH)	1.5	1.67	330	250	200	167	126	220	167	134	112	84
	2	1.93	390	290	230	193	145	260	193	155	129	97
	2.5	2.16	430	320	260	220	162	290	220	173	144	108
	3	2.37	470	360	280	240	178	320	240	189	158	118
3.5	2.56	510	380	310	260	192	340	260	200	171	128	
TJ60-11008VS (50 MESH)	1.5	2.23	450	330	270	220	167	300	220	179	149	112
	2	2.58	520	390	310	260	193	340	260	210	172	129
	2.5	2.88	580	430	350	290	220	380	290	230	192	144
	3	3.16	630	470	380	320	240	420	320	250	210	158
3.5	3.41	680	510	410	340	260	450	340	270	230	171	
TJ60-11010VS (NO STRAINER)	1.5	2.79	560	420	330	280	210	370	280	220	186	139
	2	3.22	640	480	390	320	240	430	320	260	210	161
	2.5	3.60	720	540	430	360	270	480	360	290	240	180
	3	3.95	790	590	470	390	300	530	390	320	260	197
3.5	4.26	850	640	510	430	320	570	430	340	280	210	

TABULATION IS BASED ON SPRAYING WATER AT TEMPERATURE OF 20° C.

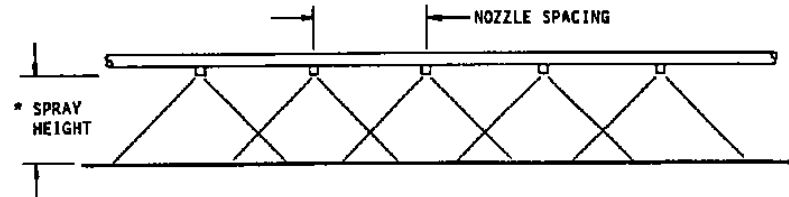

* ADJUST SPRAY HEIGHT IN THE FIELD TO OVERLAP APPROXIMATELY 30% OF EACH EDGE OF PATTERN.

THE PERFORMANCE OF ANY AGRICULTURAL CHEMICAL DEPENDS UPON THE PROPER APPLICATION OF THE CORRECT AMOUNT. BE SURE THAT YOUR EQUIPMENT HAS BEEN PROPERLY CALIBRATED BEFORE SPRAYING.

THE TJ60-- TWINJET™ TIPS CAN ALSO BE USED WITH ALL TEEJET NOZZLES.

DESCRIPTION:
LITERS PER HECTARE
USING QUICK TEEJET NOZZLES
WITH TJ60-65 DEG. AND
TJ60-110 DEG.
TWINJET SPRAY TIPS

(METRIC)



Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No.

Data Sheet No.

Ref.

20871

SHEET OF