


**SOLID STREAM
SPRAY PATTERN**

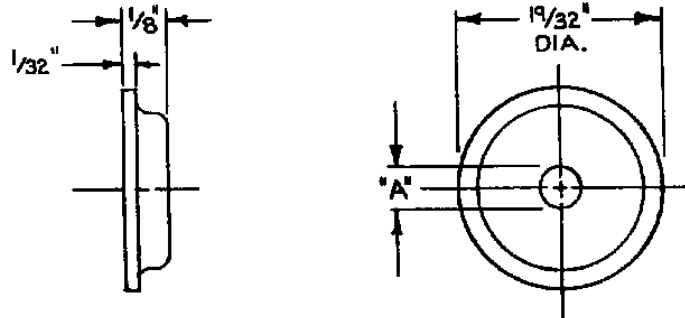

MATERIAL—HARDENED STAINLESS STEEL

ORIFICE DISC. NO.	"A" ORIFICE DIA.	CAPACITY—G.P.M. (GALLONS PER MINUTE) AT PRESSURE P.S.I. (LBS. PER SQ. INCH)				
		40 P.S.I.	100 P.S.I.	200 P.S.I.	400 P.S.I.	800 P.S.I.
D1	.031 "	.12	.19	.27	.38	.54
D1.5	.036 "	.16	.25	.36	.51	.72
D2	.041 "	.21	.32	.46	.65	.92
D3	.047 "	.28	.44	.63	.89	1.3
D4	.063 "	.50	.79	1.1	1.6	2.2
D5	.078 "	.78	1.2	1.7	2.5	3.5
D6	.094 "	1.1	1.8	2.5	3.5	4.9
D7	.109 "	1.5	2.4	3.4	4.7	6.7
D8	.125 "	2.0	3.2	4.5	6.3	8.9
D10	.156 "	3.1	4.9	6.9	9.8	13.9
D12	.188 "	4.5	7.2	10.1	14.3	20
D14	.219 "	6.2	9.8	13.9	19.7	28
D16	.250 "	7.9	12.5	17.7	25	35

TABULATION IS BASED ON WATER AT TEMPERATURE OF 70°F.
TYPE D—ORIFICE DISCS ARE USED WITH 1/4 T—AND 1/4 TT NOZZLES.

DESCRIPTION:
CAPACITY TABULATION
FOR
ORIFICE DISCS



Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

20884

Ref.

SHEET OF