


TIP COLOR	TWINJET® TIP NO. AND STRAINER SCREEN SIZE	LIQUID PRESS. IN P.S.I.	CAPACITY IN G.P.M.	CAPACITY IN OZ./MIN.	GALLONS PER ACRE							
					20" NOZZLE SPACING				30" NOZZLE SPACING			
					5 MPH	6 MPH	7 MPH	8 MPH	5 MPH	6 MPH	7 MPH	8 MPH
BEIGE	TJ60-650134VS (100 MESH)	30	0.12	15	6.9	5.7	4.9	4.3	4.6	3.8	3.3	2.9
		40	0.13	17	8.0	6.6	5.7	5.0	5.3	4.4	3.8	3.3
		50	0.15	19	8.9	7.4	6.4	5.6	5.9	4.9	4.2	3.7
		60	0.16	20	9.7	8.1	7.0	6.1	6.5	5.4	4.6	4.1
YELLOW	TJ60-6502VS TJ60-8002VS TJ60-11002VS (100 MESH)	30	0.17	22	10.3	8.6	7.3	6.4	6.9	5.7	4.9	4.3
		40	0.20	26	11.9	9.9	8.5	7.4	7.9	6.6	5.7	4.9
		50	0.22	28	13.3	11.1	9.5	8.3	8.9	7.4	6.3	5.5
		60	0.24	31	14.6	12.1	10.4	9.1	9.7	8.1	6.9	6.1
BLUE	TJ60-6503VS TJ60-8003VS TJ60-11003VS (100 MESH)	30	0.24	33	15.4	12.9	11.0	9.6	10.3	8.6	7.3	6.4
		40	0.30	38	17.8	14.9	12.7	11.1	11.9	9.9	8.5	7.4
		50	0.34	44	19.9	16.6	14.2	12.5	13.3	11.1	9.5	8.3
		60	0.37	47	22	18.2	15.6	13.6	14.6	12.1	10.4	9.1
RED	TJ60-6504VS TJ60-8004VS TJ60-11004VS (50 MESH)	30	0.35	45	21	17.1	14.7	12.9	13.7	11.4	9.8	8.6
		40	0.40	51	24	19.8	17.0	14.8	15.8	13.2	11.3	9.9
		50	0.45	58	27	22	19.0	16.6	17.7	14.8	12.7	11.1
		60	0.49	63	29	24	21	18.2	19.4	16.2	13.9	12.1
GRAY	TJ60-6506VS TJ60-8006VS TJ60-11006VS (50 MESH)	30	0.52	67	31	26	22	19.3	21	17.1	14.7	12.9
		40	0.60	77	36	30	25	22	24	19.8	17.0	14.8
		50	0.67	86	40	33	28	25	27	22	19.0	16.6
		60	0.73	93	44	36	31	27	29	24	21	18.2
WHITE	TJ60-6508VS TJ60-8008VS TJ60-11008VS (50 MESH)	30	0.69	88	41	34	29	26	27	23	19.6	17.1
		40	0.80	102	48	40	34	30	32	26	23	19.8
		50	0.89	114	53	44	38	33	35	30	25	22
		60	0.98	125	58	49	42	36	39	32	28	24
LIGHT BLUE	TJ60-8010VS TJ60-11010VS (50 MESH)	30	0.87	111	51	43	37	32	34	29	25	21
		40	1.00	128	59	50	42	37	40	33	28	25
		50	1.12	143	66	55	47	42	44	37	32	28
		60	1.23	157	73	61	52	45	49	40	35	30


TABULATION BASED ON SPRAYING WATER AT TEMPERATURE OF 70° F.




\* ADJUST SPRAY HEIGHT IN FIELD TO OVERLAP APPROXIMATELY 30% OF EACH EDGE OF PATTERN.

**DESCRIPTION:**

GALLONS PER ACRE  
USING TJ60 - - - TWINJET®  
VISIFLO® SPRAY TIPS

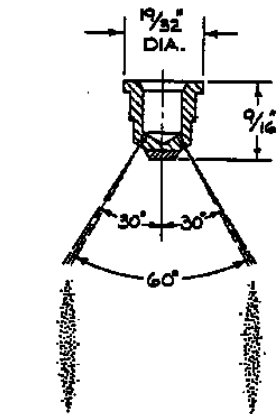


2 FLAT SPRAY PATTERNS




MATERIAL: STAINLESS STEEL WITH VISIFLO® COLOR CODING.

DIRECTION OF TRAVEL



POST-EMERGE APPLICATION

DIRECTION OF TRAVEL

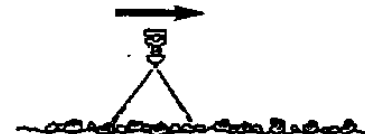

PRE-EMERGE APPLICATION

- PROVIDES FRONT AND REAR SURFACE COVERAGE OF CROP OR WEED WITHOUT SACRIFICING UNIFORMITY.
- IDEAL FOR PROVIDING A PENETRATING, THOROUGH COVERAGE WITH POST-EMERGE HERBICIDES.
- GOOD PRE-EMERGE COVERAGE ON CLODDY FIELDS AND FIELDS COVERED WITH CROP RESIDUE.

THE PERFORMANCE OF ANY AGRICULTURAL CHEMICAL DEPENDS UPON THE PROPER APPLICATION OF THE CORRECT AMOUNT. BE SURE THAT YOUR EQUIPMENT HAS BEEN PROPERLY CALIBRATED BEFORE SPRAYING.



**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

24282

Ref.

SHEET OF