




TIP COLOR	TWINJET® TIP NO. AND STRAINER SCREEN SIZE	LIQUID PRESSURE bar	CAPACITY IN l/min	LITERS PER HECTARE							
				50 cm NOZZLE SPACING				75 cm NOZZLE SPACING			
				8 km/h	10 km/h	12 km/h	14 km/h	8 km/h	10 km/h	12 km/h	14 km/h
BEIGE	TJ60-650134VS (100 MESH)	2	0.49	65	52	43	37	43	35	29	25
		2.5	0.48	72	58	48	41	48	39	32	28
		3	0.53	79	63	53	45	53	42	35	30
YELLOW	TJ60-6502VS TJ60-8002VS TJ60-11002VS (100 MESH)	4	0.61	92	73	61	52	61	49	41	35
		2	0.65	97	77	64	55	64	52	43	37
		2.5	0.72	108	86	72	62	72	58	48	41
BLUE	TJ60-6503VS TJ60-8003VS TJ60-11003VS (100 MESH)	3	0.79	118	95	79	68	79	63	53	45
		4	0.91	137	109	91	78	91	73	61	52
		2	0.97	145	116	97	83	97	77	64	55
RED	TJ60-6504VS TJ60-8004VS TJ60-11004VS (50 MESH)	2.5	1.08	162	130	108	93	108	86	72	62
		3	1.18	178	142	118	101	118	95	79	68
		4	1.37	210	164	137	117	137	109	91	78
GRAY	TJ60-6506VS TJ60-8006VS TJ60-11006VS (50 MESH)	2	1.29	193	155	129	111	129	103	84	74
		2.5	1.44	220	173	144	124	144	115	96	82
		3	1.58	240	189	158	135	158	126	105	90
WHITE	TJ60-6508VS TJ60-8008VS TJ60-11008VS (50 MESH)	4	1.82	270	220	182	156	182	146	122	104
		2	1.93	290	230	193	166	193	155	129	111
		2.5	2.16	320	260	220	185	220	173	144	124
LIGHT BLUE	TJ60-8010VS TJ60-11010VS (50 MESH)	3	2.37	360	280	240	200	240	189	158	135
		4	2.74	410	330	270	230	270	220	182	156
		2	2.58	390	310	260	220	260	210	172	147
LIGHT BLUE	TJ60-8010VS TJ60-11010VS (50 MESH)	2.5	2.88	430	350	290	250	290	230	192	165
		3	3.16	470	380	320	270	320	250	210	180
		4	3.65	550	440	360	310	360	290	240	210
LIGHT BLUE	TJ60-8010VS TJ60-11010VS (50 MESH)	2	3.22	480	390	320	280	320	260	210	184
		2.5	3.60	540	430	360	310	360	290	240	210
		3	3.95	590	470	390	340	390	320	260	230
4	4.56	680	550	460	390	460	360	300	260		

TABULATION BASED ON SPRAYING WATER AT TEMPERATURE OF 21°C.


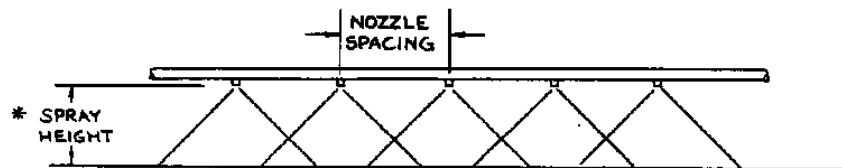


* ADJUST SPRAY HEIGHT IN FIELD TO OVERLAP APPROXIMATELY 30% OF EACH EDGE OF PATTERN.

THE PERFORMANCE OF ANY AGRICULTURAL CHEMICAL DEPENDS UPON THE PROPER APPLICATION OF THE CORRECT AMOUNT. BE SURE THAT YOUR EQUIPMENT HAS BEEN PROPERLY CALIBRATED BEFORE SPRAYING.

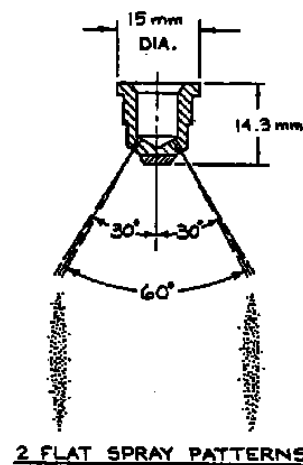

MATERIAL: STAINLESS STEEL WITH VISIFLO® COLOR CODING

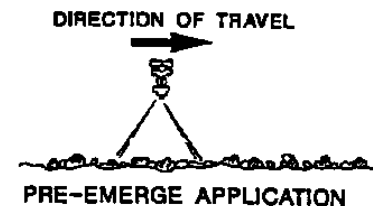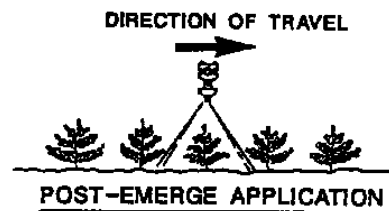

- PROVIDES FRONT AND REAR SURFACE COVERAGE OF CROP OR WEED WITHOUT SACRIFICING UNIFORMITY.
- IDEAL FOR PROVIDING A PENETRATING, THOROUGH COVERAGE WITH POST-EMERGE HERBICIDES.
- GOOD PRE EMERGE COVERAGE ON CLODDY FIELDS AND FIELDS COVERED WITH CROP RESIDUE.

DESCRIPTION:

LITERS PER HECTARE
USING TJ60 - - - TWINJET
VISIFLO SPRAY TIPS
(METRIC)



Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No.

Data Sheet No.

Ref.

24282M

SHEET OF