


**SUGGESTED TANK RINSING NOZZLES**

**21400-HSS18-316SS**

3/4" N.P.T. (F) OR  
3/4" B.S.P.T. (F)  
INLET CONN.

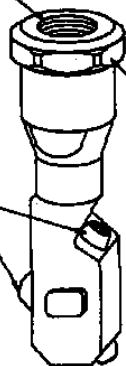

1 3/4" HEX.


MULTIPLE  
SPRAY  
ORIFICES

SEE DATA SHEET #25910  
FOR MORE INFORMATION

**MATERIAL:**  
TYPE 316 STAINLESS  
STEEL

**27500E-3/4-18-TEF**

3/4" N.P.T. (F)  
INLET CONN.



**MATERIAL:** TEFLON

MULTIPLE  
SPRAY  
ORIFICES

SEE DATA SHEET #25911  
FOR MORE INFORMATION

● TANK RINSING SHOULD BE PERFORMED AT PRESSURES BETWEEN 10 P.S.I. TO 40 P.S.I. (1 - 3 bar)

● ONE RINSING NOZZLE PER SECTION OF TANK IF BAFFLES ARE PRESENT INSIDE THE TANK

● TANK SHOULD BE RINSED AND FLUSHED IN THREE REPETITIONS TO ACHIEVE EFFECTIVE RINSING

**DESCRIPTION:**  
TANK RINSING DIAGRAM FOR  
AGRICULTURAL SPRAYER TANKS



**Spraying Systems Co.**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No. 1

Data Sheet No.

25912

Ref.

SHEET OF