


FEATURES

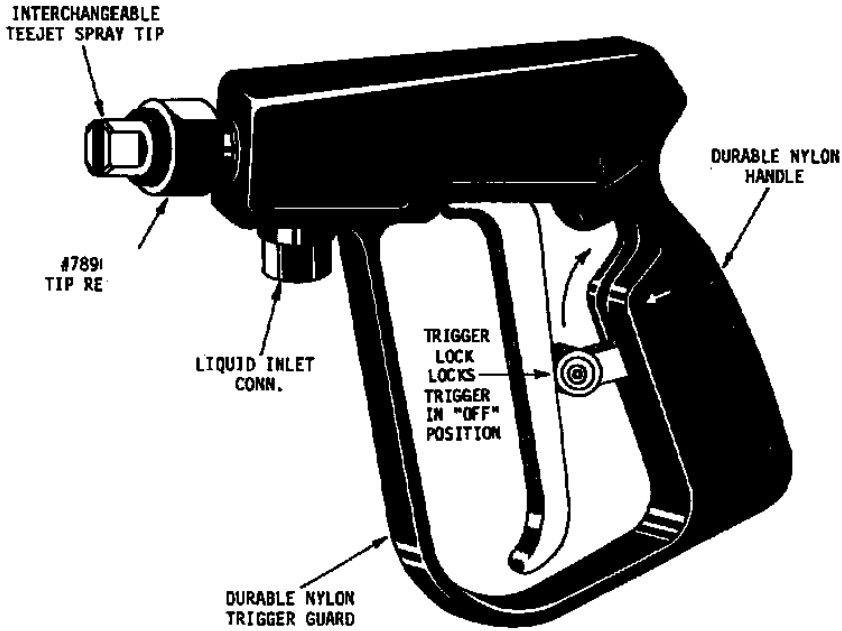

- SMOOTH AND EASY TO OPERATE...LIGHT TRIGGER PULL WITH POSITIVE FEEL MAINTAINED AND CONTROLLED, EVEN UNDER MAXIMUM DESIGN OPERATING FLOW AND PRESSURE CONDITIONS.
- TRIGGER LOCK RETRACTS FLUSH IN HANDLE WITH DETENT HOLD.
- HEAVY DUTY...DESIGNED TO WITHSTAND HIGH IMPACT AND ROUGH USAGE.
- SHORT HAND GRIP (HANDLE TO TRIGGER).
- HANDLE REMAINS COMFORTABLE DURING HOT SPRAYING OPERATING UP TO 200°F (93° C).
- PRESSURES UP TO 250 PSI (17.2 Bar).
- HANDLE GRIP DESIGNED FOR GLOVED OR UN-GLOVED HAND.
- FLOW RATES UP TO 5 GPM (19 L/Min.). PRESSURE DROP AT 5 GPM (19 L/Min.) IS 14 PSI (.97 Bar).
- BUNA-N STEM SEAL.
- MAXIMUM TEMPERATURE - 200° F (93° C)
- N VALVE SEAT.
- OUTER HOUSING WITH TRIGGER GUARD MOLDED OF HIGH IMPACT NYLON MATERIAL.
- STAINLESS STEEL SHUT-OFF NEEDLE.
- WILL ACCOMMODATE STANDARD SS CO. ACCESSORIES FOR BOTH THE INLET AND OUTLET CONNECTION (WITHIN THE ACCESSORIES' PRESSURE LIMITATIONS) SUCH AS: EXTENSIONS, SWIVELS, STRAINERS AND ADAPTERS.
- SINGLE PIECE BRASS FORGED VALVE BODY.

MODEL NO.	INLET CONN.	OUTLET CONN.	OVERALL LENGTH	OVERALL HEIGHT	WEIGHT
30L-1/4	1/4" NPT (F)	11/16" THD. (M)	8"	6-9/16"	15 oz.
B30L-1/4	1/4" BSPT (F)	TO FIT 7890 CAP	{203 mm}	{167 mm}	{0.43 kg}

DESCRIPTION:
NO. 30L GUNJET SPRAY GUN



Spraying Systems Co.®
Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No.	Data Sheet No.
Ref.	30L
SHEET OF	