


**FRONT VIEW**

MODEL NO.	INLET AND OUTLET CONN.
AA343M-3-3/8-PP	3/8" N.P.T.(F)
AA343M-3-1/2-PP	1/2" N.P.T.(F)
AAB343M-3-3/8-PP	3/8" B.S.P.T.(F)
AAB343M-3-1/2-PP	1/2" B.S.P.T.(F)

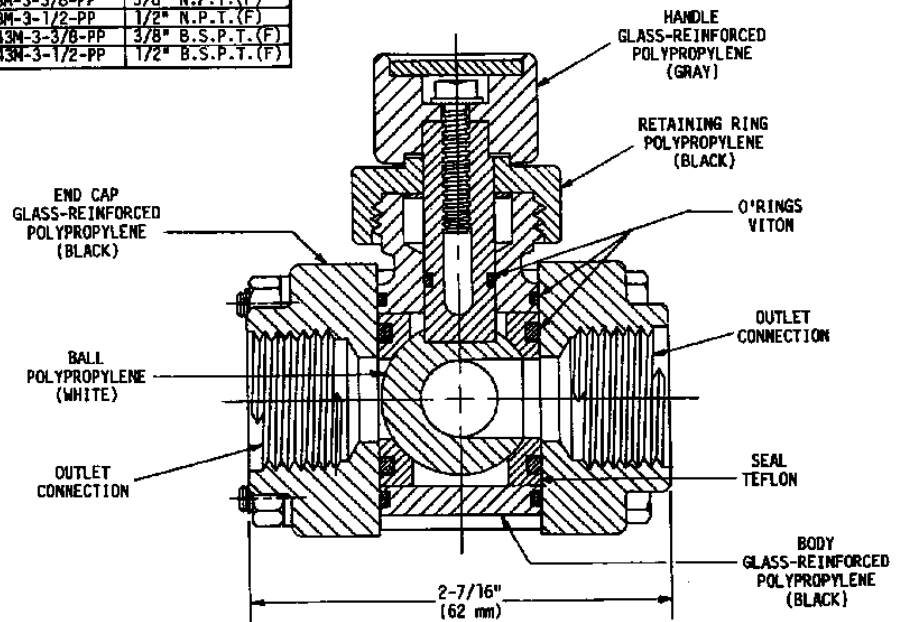

**CROSS SECTION SIDE VIEW**

**FEATURES:**

- EASILY INSTALLS IN SYSTEM (FLOWS EITHER DIRECTION).
- MAXIMUM OPERATING PRESSURE 150 PSI (10 bar).
- MATERIALS OF CONSTRUCTION OFFER EXCELLENT CORROSION RESISTANCE. WETTED PARTS - GLASS-REINFORCED POLYPROPYLENE, TEFLON, POLYPROPYLENE, VITON.
- DESIGNED FOR EASE OF ASSEMBLY AND DISASSEMBLY.
- UNRESTRICTED FLOW WHEN WIDE OPEN. 5 PSI (0.35 bar) PRESSURE DROP FOR 8 GPM FLOW (30 l/min).
- QUARTER TURN OF HANDLE FROM SHUT-OFF TO FULL FLOW.

**DESCRIPTION:**

**NO. AA343-3--PP  
MANUALLY ACTUATED 3-WAY  
POLYPROPYLENE BALL VALVE**



**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Ref.

Data Sheet No.

**343M-3--PP**

SHEET OF