


FEATURES:

- PROVIDES ADJUSTABLE SPRAY FROM SOLID STREAM TO A HOLLOW CONE SPRAY PATTERN
- MADE OF POLYPROPYLENE MATERIAL FOR EXCELLENT CHEMICAL RESISTANCE
- FITS ANY 11/16" - 16 TEEJET® MALE THREAD BODIES
- 30° OFFSET FROM HORIZONTAL INCORPORATED INTO MAIN TIP BODY

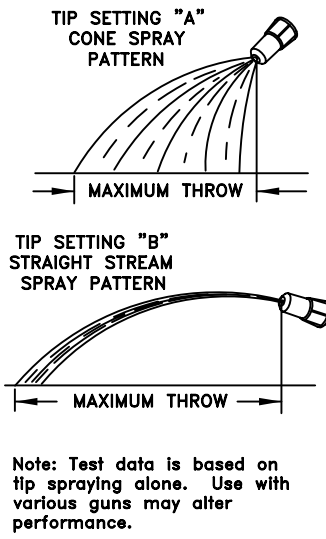

ADJUSTABLE CONEJET® NO.	PERFORMANCE	LIQUID PRESSURE IN PSI [bar]									
		20 PSI [1.4 bar]		30 PSI [2 bar]		40 PSI [2.8 bar]		60 PSI [4.1 bar]		100 PSI [7 bar]	
		SETTING A	SETTING B	SETTING A	SETTING B	SETTING A	SETTING B	SETTING A	SETTING B	SETTING A	SETTING B
38720-PP-X8 (Gray)	CAPACITY - GPM	0.097	0.33	0.12	0.40	0.13	0.47	0.16	0.57	0.21	0.74
	[l/min]	0.37	1.2	0.45	1.5	0.49	1.8	0.61	2.2	0.79	2.8
	SPRAY ANGLE	66°	-	71°	-	74°	-	77°	-	80°	-
	MAX. THROW - FT.	3	34	3	37	3	38	3	38	4	38
	METERS	1	10	1	11	1	12	1	12	1.2	12
38720-PP-X12 (Brown)	CAPACITY - GPM	0.15	0.49	0.18	0.60	0.20	0.69	0.24	0.84	0.31	1.1
	[l/min]	0.57	1.9	0.68	2.3	0.76	2.6	0.91	3.2	1.2	4.2
	SPRAY ANGLE	71°	-	75°	-	77°	-	78°	-	80°	-
	MAX. THROW - FT.	3.5	36	4	39	4	40	4	41	4	41
	METERS	1.1	11	1.2	12	1.2	12	1.2	12	1.2	12
38720-PP-X18 (Orange)	CAPACITY - GPM	0.20	0.68	0.24	0.81	0.28	0.92	0.34	1.1	0.42	1.4
	[l/min]	0.75	2.6	0.91	3.1	1.1	3.5	1.3	4.2	1.6	5.3
	SPRAY ANGLE	61°	-	68°	-	80°	-	80°	-	80°	-
	MAX. THROW - FT.	4	38	4	41	4	42	4	42	6	42
	METERS	1.2	12	1.2	13	1.2	13	1.2	13	1.8	13
38720-PP-X26 (Light Blue)	CAPACITY - GPM	0.31	0.89	0.38	1.1	0.43	1.2	0.53	1.5	0.68	1.9
	[l/min]	1.2	3.4	1.4	4.1	1.6	4.7	2.0	5.7	2.6	7.4
	SPRAY ANGLE	77°	-	82°	-	84°	-	86°	-	86°	-
	MAX. THROW - FT.	4	34	4.5	37	5	38	5.5	39	6	40
	METERS	1.2	10	1.4	11	1.5	12	1.7	12	1.8	12

DESCRIPTION:

NO. 38720-PP-X--
ADJUSTABLE CONEJET
SPRAY TIPS



Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No. 2

Data Sheet No.

38720

Ref.

SHEET OF