


# DG TeeJet®

POLYMER  
DRIFT GUARD  
FLAT SPRAY TIPS

WITH *VisiFlo*® COLOR CODING




\* ADJUST SPRAY HEIGHT IN THE FIELD TO OVERLAP MINIMUM 30% OF EACH EDGE OF PATTERN.


SUGGESTED MINIMUM SPRAY HEIGHT	
SPRAY ANGLE	20" SPACING
110°	15" - 18"

Tip Color	Tip No. (Strainer Screen Size)	Liquid Pressure in psi	Capacity 1 Nozzle in GPM	Capacity 1 Nozzle in oz/min	Gallons Per Acre 20" Spacing							
					4 mph	5 mph	6 mph	7 mph	8 mph	10 mph	12 mph	14 mph
GREEN	DG110015VP (100 Mesh)	30	.13	17	9.7	7.7	6.4	5.5	4.8	3.9	3.2	2.8
		35	.14	18	10.4	8.3	6.9	5.9	5.2	4.2	3.5	3.0
		40	.15	19	11.1	8.9	7.4	6.4	5.6	4.5	3.7	3.2
		50	.17	22	12.6	10.1	8.4	7.2	6.3	5.0	4.2	3.6
YELLOW	DG11002VP (50 Mesh)	30	.17	22	12.6	10.1	8.4	7.2	6.3	5.0	4.2	3.6
		35	.19	24	14.1	11.3	9.4	8.1	7.1	5.6	4.7	4.0
		40	.20	26	14.9	11.9	9.9	8.5	7.4	5.9	5.0	4.2
		50	.22	28	16.3	13.1	10.9	9.3	8.2	6.5	5.4	4.7
BLUE	DG11003VP (50 Mesh)	30	.26	33	19.3	15.4	12.9	11.0	9.7	7.7	6.4	5.5
		35	.28	36	21	16.6	13.9	11.9	10.4	8.3	6.9	5.9
		40	.30	38	22	17.8	14.9	12.7	11.1	8.9	7.4	6.4
		50	.34	44	25	20	16.8	14.4	12.6	10.1	8.4	7.2
RED	DG11004VP (50 Mesh)	30	.35	45	26	21	17.3	14.9	13.0	10.4	8.7	7.4
		35	.37	47	27	22	18.3	15.7	13.7	11.0	9.2	7.8
		40	.40	51	30	24	19.8	17.0	14.9	11.9	9.9	8.5
		50	.45	58	33	27	22	19.1	16.7	13.4	11.1	9.5
BROWN	DG11005VP (50 Mesh)	30	.43	55	32	26			16.0	12.8	10.6	9.1
		35	.47	60	35	28			17.4	14.0	11.6	10.0
		40	.50	64	37	30			18.6	14.9	12.4	10.6
		50	.56	72	42	33			21	16.6	13.9	11.9
		60	.61	78	45	36		26	23	18.1	15.1	12.9

TABULATION BASED ON SPRAYING WATER AT 70° F.

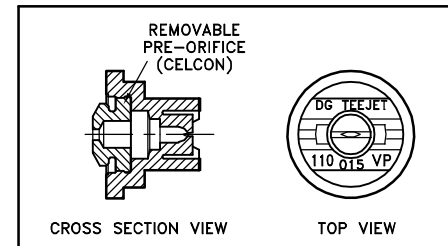

DG110--VP SPRAY TIP



FLAT SPRAY PATTERN

### FEATURES:

- PRE-ORIFICE DESIGN PRODUCES LARGE DROPLETS TO REDUCE DRIFT.
- TAPERED EDGE FLAT SPRAY PATTERN FOR UNIFORM COVERAGE WHEN ADJACENT NOZZLE PATTERNS ARE OVERLAPPED IN BROADCAST SPRAYING.
- EXCELLENT RESISTANCE TO CORROSIVE SOLUTIONS.
- SUPERIOR WEAR CHARACTERISTICS.
- DG TEEJET® DRIFT GUARD TIPS REDUCE SMALL DRIFT PRONE DROPLETS, MINIMIZING OFF TARGET SPRAY CONTAMINATION.

### TYPICAL APPLICATIONS:

- EXCELLENT FOR PRE-EMERGE SURFACE APPLIED HERBICIDES - MINIMUM SPRAY PRESSURE OF 30 PSI.
- EXCELLENT FOR POST-EMERGE SYSTEMIC HERBICIDES - MINIMUM SPRAY PRESSURE OF 30 PSI.

**DESCRIPTION:**  
GALLONS PER ACRE TABULATION  
FOR DG-VP SPRAY TIPS  
(BBA SPECIFICATION)



**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No. 1

Data Sheet No.

**3876**

Ref.

SHEET OF