


***HOW TO ORDER:**

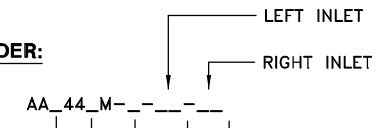

PART CODE	DESCRIPTION
	BLANK INDICATES ALL THREADED CONNECTIONS TO BE NPT
B	ALL THREADED CONNECTIONS TO BE BSPT

VALVE OUTLET	
PART CODE	DESCRIPTION
Q	QUICK CONNECTION
3	3/4" THREADED OUTLET
4	1" THREADED OUTLET

NUMBER OF VALVES	
PART CODE	DESCRIPTION
1	1 VALVE MANIFOLD
2	2 VALVE MANIFOLD
3	3 VALVE MANIFOLD
4	4 VALVE MANIFOLD
5	5 VALVE MANIFOLD


INLET CONNECTIONS	
PART CODE	DESCRIPTION
4H	1" STRAIGHT HOSE BARB
5H	1 1/4" STRAIGHT HOSE BARB
4T	1" THREADED INLET
1T	1/4" THREADED INLET
B	BLANK

Q OULET CONNECTIONS (ORDER SEPARATELY)	
PART CODE	DESCRIPTION
45529-1/2	1/2" HOSE BARB STRAIGHT
45529-3/4	3/4" HOSE BARB STRAIGHT
45529-1	1" HOSE BARB STRAIGHT
45529-1/2-90	1/2" HOSE BARB 90 DEG
45529-3/4-90	3/4" HOSE BARB 90 DEG
45529-1-90	1" HOSE BARB 90 DEG

FEATURES INCLUDE:

- ASSEMBLIES AVAILABLE IN 1, 2, 3, 4, OR 5 VALVE COMBINATIONS.
- SINGLE BALL VALVE SUB-ASSEMBLIES AVAILABLE FOR ASSEMBLY WITH APPROPRIATE MOUNTING KITS (SEE PARTS LIST AA44_-)
- AVAILABLE WITH 1/4", 1" NPT and BSPT THREADED, 1", 1-1/4" HOSE BARB, OR BLANK MANIFOLD INLETS.
- 3/4" & 1" NPT OR 3/4" & 1" BSPT VALVE OUTLETS
- MAXIMUM PRESSURE RATING: 300 PSI [20 bar]


INLETS AVAILABLE:

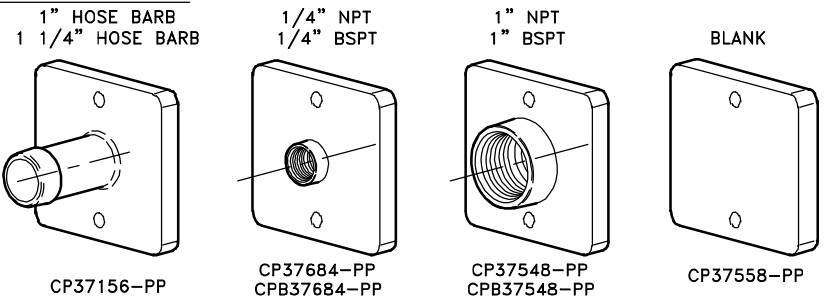

"Q" OUTLETS INCLUDE CLIP AND O-RING

* ORDERING INFORMATION FOR PRE-ASSEMBLED MANIFOLDS ONLY. TO ORDER INDIVIDUAL BALL VALVE SUB-ASSEMBLIES AND MOUNTING KITS SEE PARTS LIST AA44_M-

DESCRIPTION:
AA(B)440M
MANUALLY OPERATED
TWO-WAY DIRECTVALVE
BALL VALVE MANIFOLD
(NPT & BSPT CONN.)



Spraying Systems Co.
Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No.	Data Sheet No.
Ref.	440M
	SHEET OF