


FLAT SPRAY PATTERN

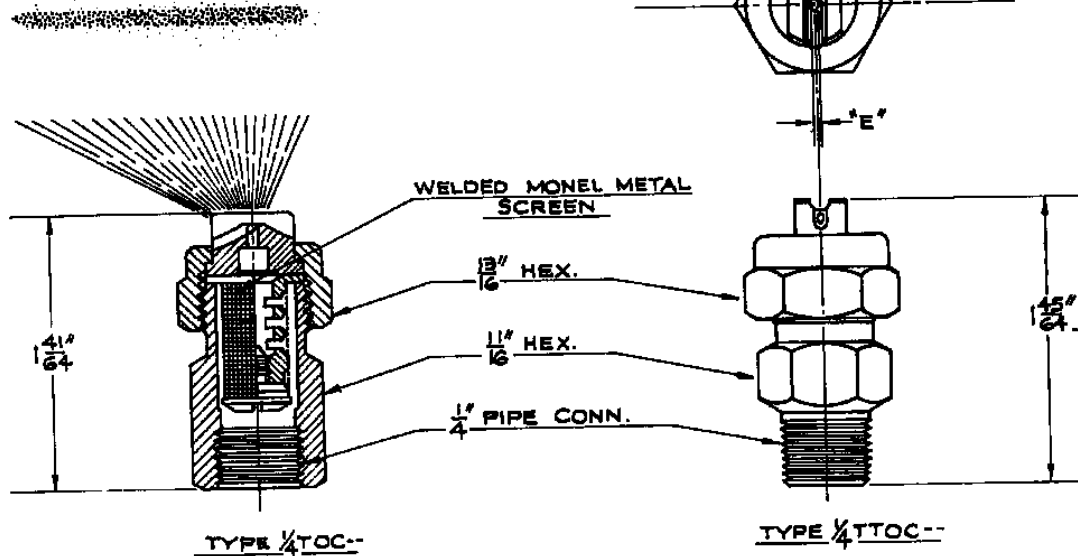

NOZZLE NO.		APPROX. EQUIV. ORIFICE DIA.	"E"	MESH OF SCREEN	CAPACITY G.P.M. (Gallons Per Minute) AT p.s.i. (lbs. per square inch)															
TYPE T FEMALE CONN.	TYPE TT MALE CONN.				5	7	10	15	20	30	40	60	80	100	150	200	300	400		
1/4 TOC01	1/4 TTOC01	.026"	.015	100	.03	.04	.05	.06	.07	.09	.10	.12	.14	.16	.19	.22	.27	.32		
1/4 TOC02	1/4 TTOC02	.036"	.020"	50	.07	.09	.10	.12	.14	.17	.20	.25	.28	.32	.39	.45	.55	.64		
1/4 TOC03	1/4 TTOC03	.043"	.026"	50	.10	.13	.15	.18	.21	.26	.30	.37	.42	.47	.58	.67	.82	.94		
1/4 TOC04	1/4 TTOC04	.052"	.030"	50	.14	.17	.20	.25	.28	.35	.40	.49	.57	.63	.78	.90	1.10	1.26		
1/4 TOC06	1/4 TTOC06	.062"	.036"	50	.21	.25	.30	.37	.42	.52	.60	.73	.85	.95	1.16	1.34	1.64	1.90		
1/4 TOC08	1/4 TTOC08	.072"	.042"	50	.28	.38	.40	.49	.56	.69	.80	.98	1.13	1.26	1.55	1.79	2.20	2.52		
1/4 TOC12	1/4 TTOC12	.085"	.054"	—	.42	.50	.60	.73	.85	1.04	1.20	1.47	1.70	1.90	2.32	2.68	3.28	3.79		
1/4 TOC16	1/4 TTOC16	.103"	.067"	—	.57	.67	.80	.98	1.13	1.39	1.60	1.96	2.28	2.53	3.10	3.58	4.38	5.06		

ABOVE TABULATION IS BASED ON WATER AT TEMPERATURE OF 70° F.

DESCRIPTION:
 TABULATION OF CAPACITIES FOR
 1/4 TOC-- AND 1/4 TTOC--
 TEEJET NOZZLES



Spraying Systems Co.®
 Spray Nozzles and Accessories
 P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

4788

Ref.

SHEET OF