
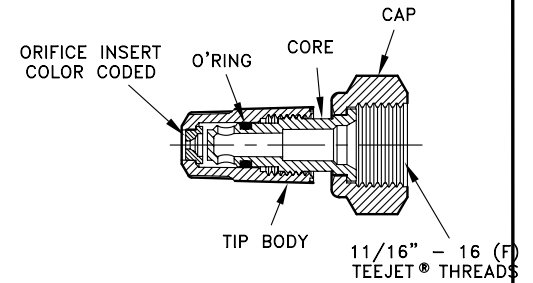


ADJUSTABLE CONEJET® TIP No.	ORIFICE INSERT COLOR	PERFORMANCE	LIQUID PRESSURE IN bar											
			1.5 bar		2 bar		3 bar		4 bar		7 bar		10 bar	
			SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B
5500-PPB-X3	YELLOW	CAPACITY-l/min	.14	.49	.17	.64	.19	.72	.22	.87	.28	1.14	.33	1.40
		SPRAY ANGLE	57°	-	68°	-	72°	-	76°	-	80°	-	82°	-
		MAX. THROW-m	.61	9.4	.61	10.1	.61	10.1	.61	9.7	.91	8.8	.91	7.7
5500-PPB-X5	LIGHT GREEN	CAPACITY-l/min	.23	.79	.29	.98	.31	1.14	.38	1.40	.49	1.82	.57	2.20
		SPRAY ANGLE	61°	-	70°	-	74°	-	77°	-	80°	-	81°	-
		MAX. THROW-m	.76	9.9	.76	10.2	.91	10.2	.91	9.8	.91	9.0	.91	8.0
5500-PPB-X6	RED	CAPACITY-l/min	.28	.98	.33	1.21	.38	1.40	.45	1.70	.57	2.20	.72	2.69
		SPRAY ANGLE	65°	-	71°	-	74°	-	77°	-	80°	-	80°	-
		MAX. THROW-m	.76	10.2	.91	10.4	.91	10.4	1.1	10.0	1.1	9.2	1.1	8.3
5500-PPB-X8	GRAY	CAPACITY-l/min	.37	1.25	.45	1.51	.49	1.78	.61	2.16	.79	2.80	.95	3.41
		SPRAY ANGLE	66°	-	71°	-	74°	-	77°	-	80°	-	80°	-
		MAX. THROW-m	.91	10.5	.91	10.5	.91	10.5	.91	10.1	1.2	9.5	1.2	8.7
5500-PPB-X12	BROWN	CAPACITY-l/min	.57	1.85	.68	2.27	.76	2.61	.91	3.18	1.17	4.16	1.44	4.92
		SPRAY ANGLE	69°	-	73°	-	76°	-	78°	-	80°	-	80°	-
		MAX. THROW-m	1.1	10.9	1.2	10.9	1.2	10.9	1.2	10.7	1.2	10.1	1.2	9.0
5500-PPB-X18	ORANGE	CAPACITY-l/min	.79	2.61	.98	3.18	1.14	3.67	1.40	4.54	1.78	5.68	2.20	7.19
		SPRAY ANGLE	71°	-	75°	-	77°	-	78°	-	80°	-	79°	-
		MAX. THROW-m	1.2	11.0	1.2	11.1	1.2	11.1	1.2	11.0	1.5	10.4	1.5	9.5



ABOVE DATA IS BASED ON SPRAYING WATER FROM A HEIGHT OF ABOUT 0.8 m ... WITH TIP TILTED ABOUT AS SHOWN BELOW FOR EACH SETTING.

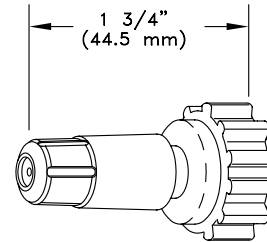


**FEATURES:**

- CAN BE USED WITH No. 22650 - TRIGGERJET SPRAY GUN.
- EASY FINGER-TIP CONTROL OF ADJUSTABLE SPRAY PATTERN, CAPACITY, SPRAY ANGLE AND COVERAGE.
- FOR CAPACITIES FROM 0.19 TO 3.7 l/min AT 3 bar
- RANGE OF SPRAY PATTERNS:
  1. FINELY ATOMIZED CONE SPRAY
  2. NARROW ANGLE CONE SPRAY
  3. FULL CONE SPRAY
  4. SOLID STREAM SPRAY
- 150 PSI (10 bar) PRESSURE RATING.

**MATERIAL:**  
POLYPROPYLENE (BLACK) WITH EPDM O-RING

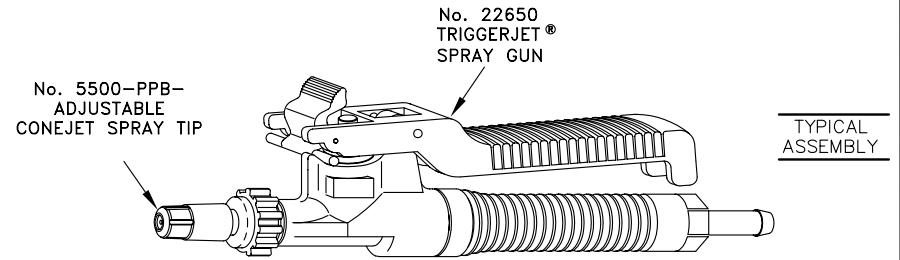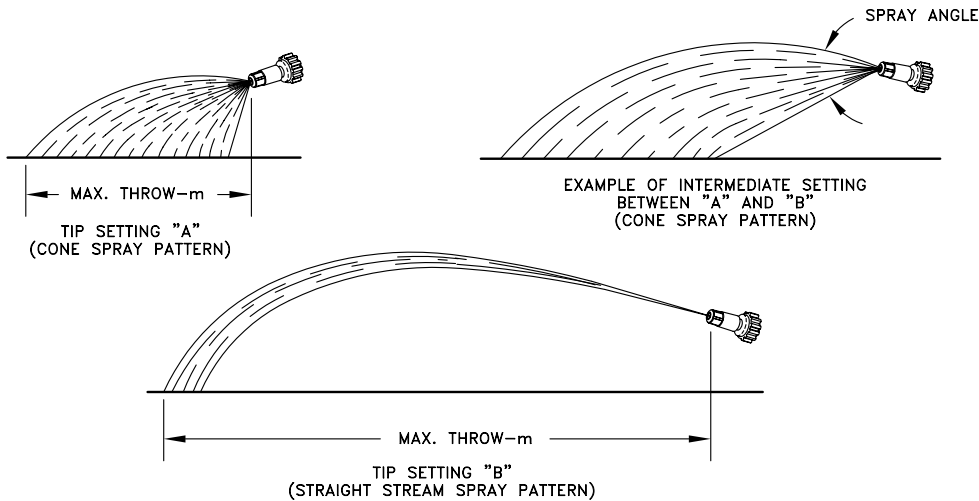

DESCRIPTION:  
NO. 5500-PPB-  
ADJUSTABLE CONEJET  
SPRAY TIP  
(METRIC)

 <b>Spraying Systems Co.®</b> Spray Nozzles and Accessories P.O. Box 7900 - Wheaton, Il. 60189-7900		Rev. No.	Data Sheet No.
		Ref.	<b>5500-PPB-M</b> SHEET OF