


GUNJET NO.	DATA	LIQUID PRESSURE IN LBS. PER SQUARE INCH													
		40 P.S.I.		100 P.S.I.		200 P.S.I.		300 P.S.I.		400 P.S.I.		500 P.S.I.			
		SETTING 'A'	SETTING 'B'	SETTING 'A'	SETTING 'B'	SETTING 'A'	SETTING 'B'	SETTING 'A'	SETTING 'B'	SETTING 'A'	SETTING 'B'	SETTING 'A'	SETTING 'B'		
12A-2	CAPACITY-GPM	.29	.30	.45	.47	.64	.66	.78	.81	.90	.94	1.1	1.2	1.3	1.3
	SPRAY ANGLE	20°	—	25°	—	20°	—	19°	—	17°	—	15°	—	14°	—
	MAX. THROW-FT.	10	32	10	33	10	34	10½	35	10½	35	11	35	11	35
	MAX. VERTICAL THROW-FT.	—	22	—	22	—	23	—	23	—	24	—	25	—	26
12A-4	CAPACITY-GPM	.60	.61	.92	.94	1.3	1.3	1.6	1.6	1.8	1.9	2.3	2.3	2.7	2.7
	SPRAY ANGLE	22°	—	25°	—	24°	—	20°	—	20°	—	20°	—	19°	—
	MAX. THROW-FT.	10	36	10	36	10½	37	10½	38	11	39	11	40	11	40
	MAX. VERTICAL THROW-FT.	—	26	—	27	—	28	—	29	—	30	—	31	—	32
12A-6	CAPACITY-GPM	1.2	1.3	1.9	2.0	2.7	2.9	3.3	3.5	3.8	4.1	4.6	5.0	5.3	5.6
	SPRAY ANGLE	30°	—	41°	—	38°	—	38°	—	35°	—	31°	—	30°	—
	MAX. THROW-FT.	10	44	10	45	10½	46	11	47	11	48	11	49	11	50
	MAX. VERTICAL THROW-FT.	—	28	—	30	—	32	—	33	—	34	—	35	—	36
12A-8	CAPACITY-GPM	2.0	2.5	3.1	3.4	4.4	4.8	5.3	5.9	6.2	6.8	7.6	8.4	8.8	9.0
	SPRAY ANGLE	48°	—	50°	—	48°	—	45°	—	42°	—	40°	—	38°	—
	MAX. THROW-FT.	10	45	10	46	10½	47	11	48	11	49	11	50	11	51
	MAX. VERTICAL THROW-FT.	—	29	—	32	—	35	—	36	—	37	—	38	—	39
12A-10	CAPACITY-GPM	2.6	3.2	4.1	5.0	5.8	7.1	7.1	8.7	8.7	10	10	12.2	10.7	14.1
	SPRAY ANGLE	56°	—	55°	—	51°	—	49°	—	45°	—	43°	—	40°	—
	MAX. THROW-FT.	10	46	10½	49	11	50	11.5	51	11½	52	12	53	12	54
	MAX. VERTICAL THROW-FT.	—	30	—	33	—	36	—	37	—	38	—	39	—	40



GUNJET NO. 12A CAN ALSO BE USED WITH ALL STANDARD TEEJET TIPS - MERELY BY UNSCREWING THE #1325 CAP, REMOVING THE ORIFICE DISC, AND INSERTING THE TEEJET TIP.

DESCRIPTION:
GUNJET NO. 12A

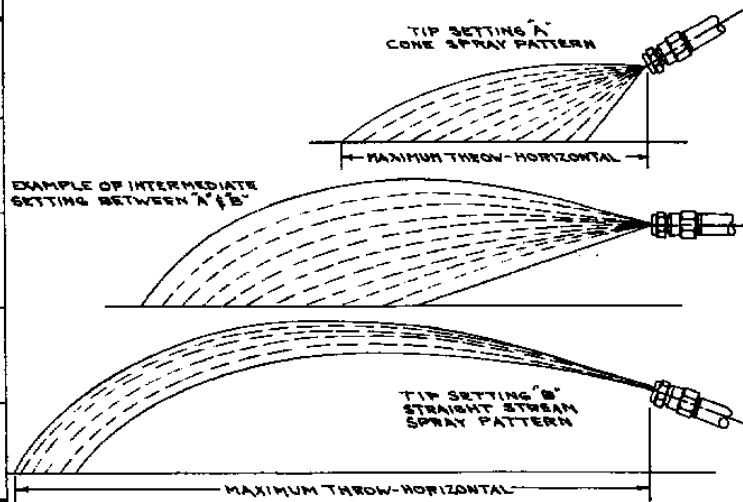

Spraying Systems Co.

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, Ill. 60189-7900

Rev. No.

Data Sheet No.

6020

Ref.

SHEET OF