


WITH HANDLE UP - ALL LIQUID
BY-PASSES THROUGH VALVE.
(NO LIQUID TO SPRAY LINE)

WITH HANDLE DOWN - LIQUID
TRAVELS TO SPRAY LINE AND
THROUGH VALVE.

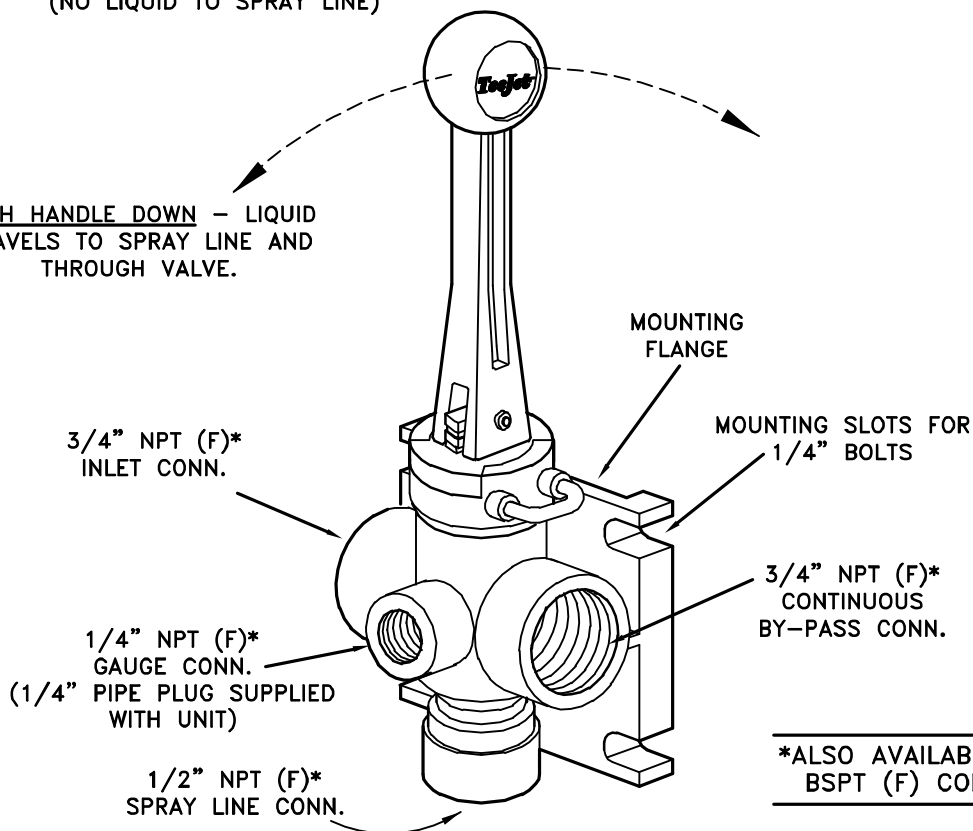

*ALSO AVAILABLE IN
BSPT (F) CONN.

FEATURES:

- CORROSION RESISTANT MATERIALS: WETTED PARTS POLYPROPYLENE, STAINLESS STEEL, AND VITON.
- MAXIMUM PRESSURE - 150 PSI (10 bar)
- LARGE CAPACITY - 12 GPM (45 l/min) @ 5 PSI (0.35 bar) PRESSURE DROP.
- ONE-PIECE MOLDED PLASTIC HANDLE
- ONE-PIECE VALVE BODY WITH MOUNTING FLANGE
- GAUGE CONNECTION
- FOR MULTIPLE ASSEMBLIES USE A 3/4" HEX NIPPLE

DESCRIPTION:
NO. 6B DIRECTOVALVE®
MANUAL CONTROL VALVE



Spraying Systems Co.®
Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No. 1

Ref.

Data Sheet No.

6B

SHEET 1 OF 2