


NO. 7130-675 & NO. 7130-800 SUCTION STRAINERS

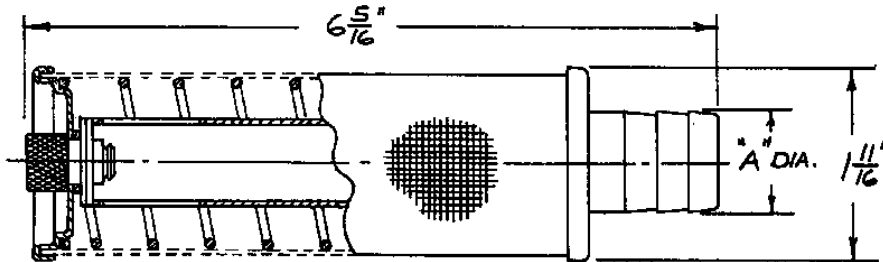

NO. 7130-1050AL SUCTION STRAINER




FIG. 1

NO. 7130 SUCTION STRAINER IS IMMERSSED DIRECTLY INTO THE SOLUTION TO BE SPRAYED. ITS SIZE PERMITS ENTRY THROUGH THE BUNG HOLE IN STANDARD STEEL DRUMS MAKING POSSIBLE AN ECONOMICAL STRAINING ARRANGEMENT.

DESIGNED FOR DIRECT ATTACHMENT TO HOSE. THIS STRAINER CAN BE CLEAN QUICKLY AND EASILY.

AVAILABLE IN ALUMINUM WITH MONEL SCREEN AND IN STAINLESS WITH STAINLESS STEEL SCREEN.

WITH STRAINER IN EITHER A VERTICAL OR HORIZONTAL POSITION LIQUID CAN BE WITHDRAWN TO WITHIN 1" OF BOTTOM OF CONTAINER. SEE FIGURE 1.

STRAINER NO.	"A" DIA.	CONSTRUCTION
7130-675AL	.675"	ALUMINUM WITH MONEL METAL SCREEN
7130-800AL	.800"	
7130-1050AL	1.050"	
7130-675SS	.675"	STAINLESS STEEL WITH STAINLESS STEEL SCREEN
7130-800SS	.800"	

SCREEN DATA	
MESH SIZE	OPEN AREA
50 MONEL	8.4 SQ. IN.
50 S.S.	7.1 SQ. IN.
100 MONEL	7.4 SQ. IN.
100 S.S.	7.4 SQ. IN.

SEE AGRICULTURAL CAT. FOR COMPLETE LISTING OF NOZZLES & ACCESSORIES.

DESCRIPTION:

NO. 7130
SUCTION STRAINER



Spraying Systems Co.[®]

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

7130

Ref.

SHEET OF