


TeeJet® 72333-D ELECTRIC BALL VALVE ADAPTER

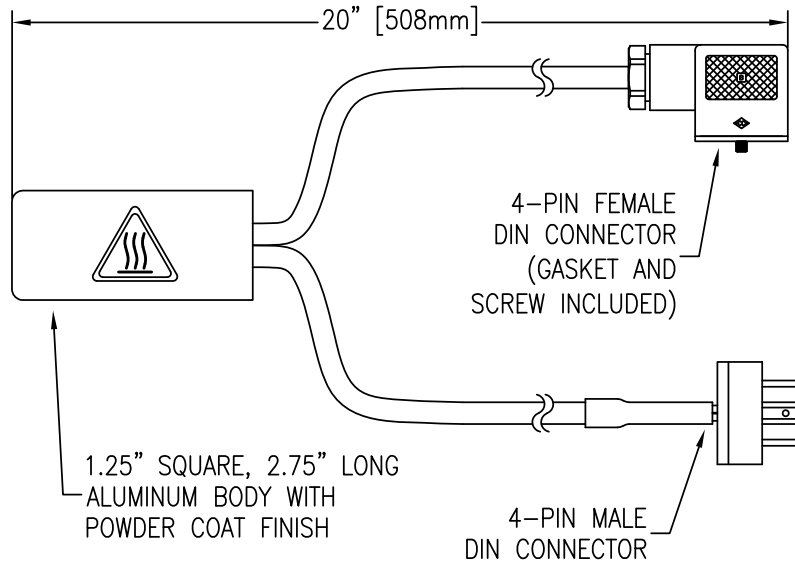

NOTE: ALL DIMENSIONS ARE APPROXIMATE.

FEATURES:

- FOR USE WITH TEEJET 344, 440, 450 AND 460 SERIES BALL VALVES AND MANIFOLDS EQUIPPED WITH BE & BEC STYLE SHUT-OFF MOTORS BEING USED IN CONJUNCTION WITH AUTOMATIC BOOM SECTION CONTROL SYSTEMS.
- ADAPTER TO BE INSTALLED BETWEEN MOTOR AND CONTROL HARNESS.
- PREVENTS PREMATURE TRIPPING OF INTERNAL FUSE ON BALL VALVE MOTOR IF THE VALVE IS SUBJECT TO RAPID ON-OFF CYCLING.
- FOR USE WITH MOTORS EQUIPPED WITH DIN CONNECTOR.
- SCREW AND GASKET INCLUDED - MUST BE USED TO ENSURE WATER-TIGHT SEAL.
- POTTED INTERNAL CAVITY AND POWDER COAT FINISH FOR RELIABILITY AND DURABILITY.
- METAL BODY FUNCTIONS AS HEAT SINK AND MUST BE EXPOSED TO AMBIENT AIR FOR PROPER OPERATION.
- ADAPTER SHOULD BE SECURELY FASTENED TO MACHINE (CABLE TIES PROVIDED) TO PREVENT DAMAGE OR UNNECESSARY STRAIN ON CABLES.

HOW TO ORDER:

- 72333-D - ADAPTER WITH 4-PIN DIN CONNECTOR

NOTE: 3-PIN PACKARD CONNECTOR VERSION ALSO AVAILABLE - SEE DATA SHEET 72333

CAUTION: ADAPTER BODY MAY BECOME HOT FROM USE. AVOID DIRECT CONTACT UNTIL THE UNIT HAS COOLED.

DESCRIPTION:

72333-D ELECTRIC
BALL VALVE ADAPTER



Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No. 1

Ref.

DATA SHEET

72333-D

SHEET OF