


- THIS NOZZLE IS DESIGNED FOR USE ON THE END OF DROP PIPES FOR ROW CROP SPRAYING.
- EACH NOZZLE CAN BE POSITIONED BY HAND TO ANY SETTING ON A 280° ARC—WITHOUT LOOSENING THE CAP NUTS—AND WITHOUT USING A WRENCH.
- THIS SETTING WILL HOLD IN SPITE OF VIBRATIONS AND MODERATE JARS.

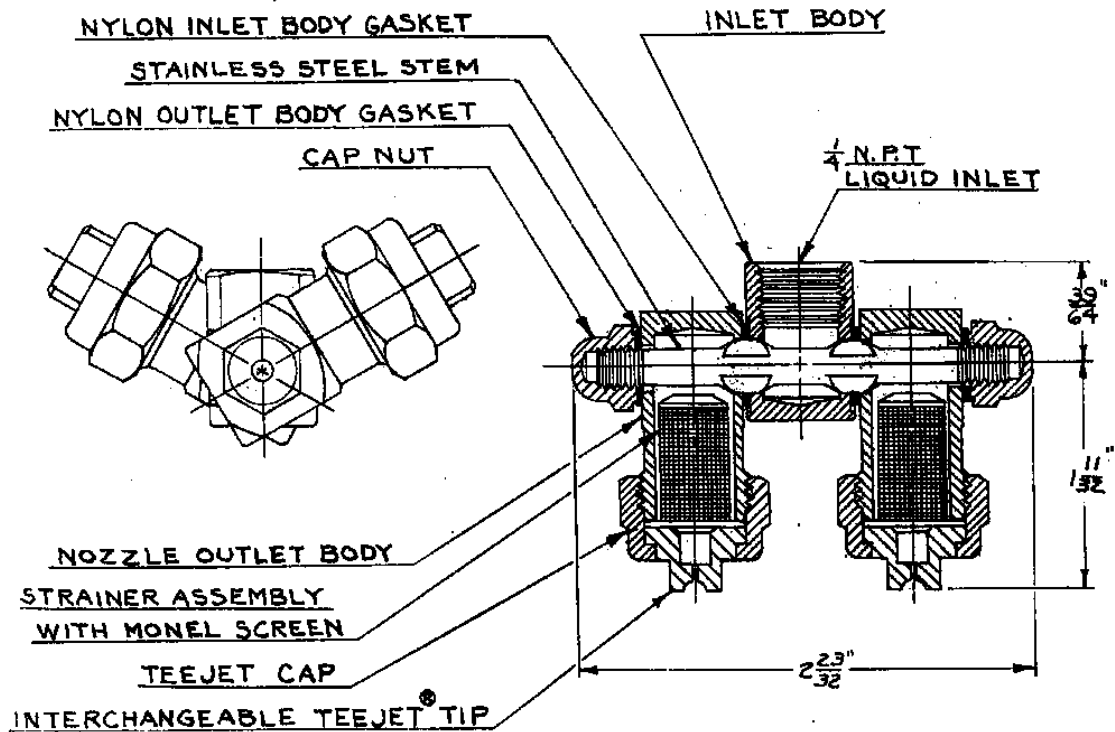

FOR USE WITH STANDARD FLAT SPRAY TEEJET<sup>®</sup> TIPS AND STANDARD CONE SPRAY TIPS. FOR SPRAY ANGLES AND CAPACITIES SEE CATALOG 33 AND DRAWINGS 2851 AND 4911.

EACH OUTLET CAN ACCOMMODATE A TEEJET<sup>®</sup> NOZZLE UP TO .8 GPM CAPACITY

**DESCRIPTION:**

**E7450-2T  
COMPACT DOUBLE SWIVEL  
TEEJET NOZZLE**



**Spraying Systems Co.<sup>®</sup>**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No.

Data Sheet No.

**7450-2T**

Ref.

SHEET OF