


CAN ALSO BE SUPPLIED WITH EXTRA DUTY SPRING
FOR PRESSURES UP TO 700 P.S.I. — NO. 6815-1/2HSS-700.

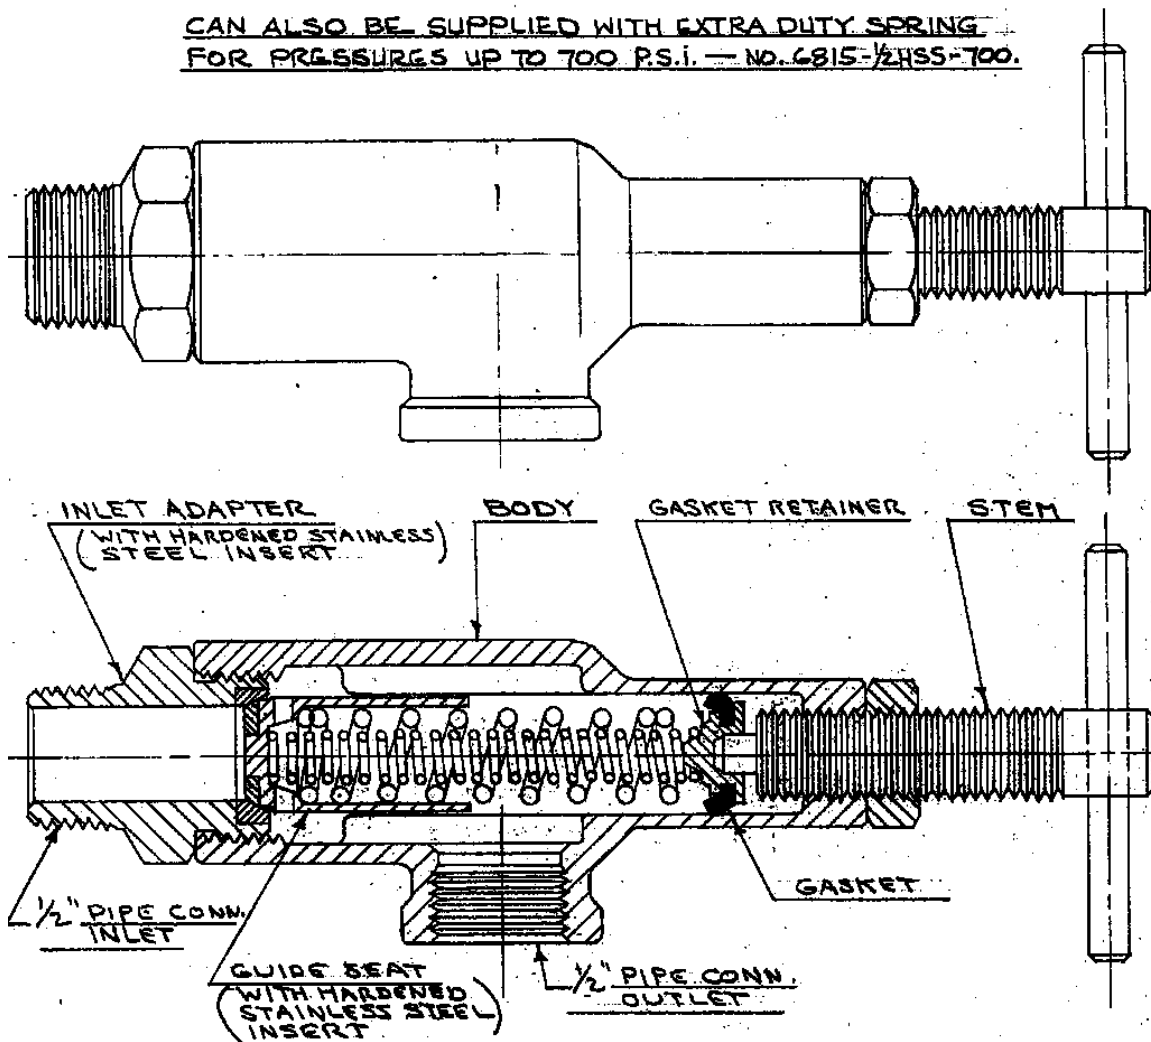

CONSTRUCTION	
No. 6815-1/2 HSS	BRASS, STAINLESS STEEL + HARDENED STAINLESS STL.

MAXIMUM FLOW RATES THRU VALVE AT VARIOUS LIQUID PRESSURES												
PRESSURE IN p.s.i. →	10	15	20	25	30	35	40	50	60	70	80	100
MAX. FLOW IN G.P.M. →	18	23	26	29	32	34	36	40	44	47	50	56

p.s.i. = Lbs. per square inch

G.P.M. = Gallons Per Minute

MAXIMUM PRESSURE TO ADJUST IS 300 P.S.I.

DESCRIPTION:

**NO. 6815-1/2 HSS
PRESSURE RELIEF VALVE**



Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

7840

Ref.

SHEET OF