

A

B

C

D

1

2

3

4

**ISC Solenoid Cable
Conxall, 5 pos.**

Position	Color	Function
1	Black	Open
2	Red	(+12v)Fil. SW
3	Green	Ground
4	White	Close
5	Brown	Tach Sig.

**Power Console
Conxall, 2 Pos.**

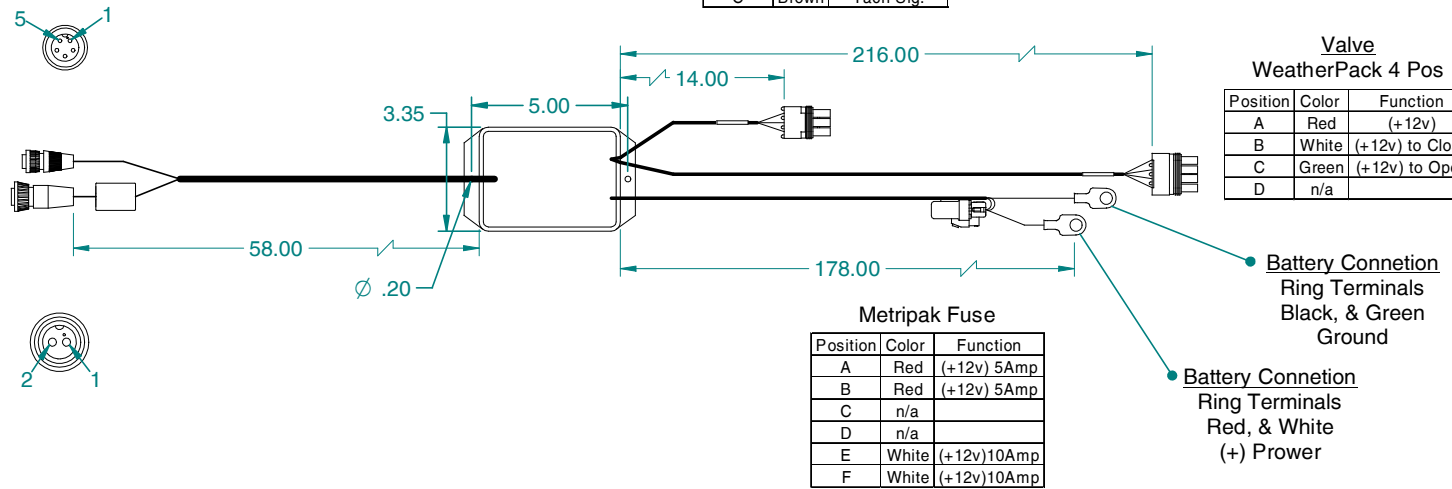
Position	Color	Function
1	Black	Ground
2	Red	(+12v)

**Rate Sensor
WeatherPack 3 Pos.**




Position	Color	Function
A	Green	Ground
B	Red	(+12v) Fil. SW
C	Brown	Tach Sig.

**Valve
WeatherPack 4 Pos**

Position	Color	Function
A	Red	(+12v)
B	White	(+12v) to Close
C	Green	(+12v) to Open
D	n/a	



Note: 1.0 All Dimensions are displayed in "Inches" Unless otherwise specified.

MATERIAL:		n/a			
FINISH:		n/a			
PROJECTION:		SCALE:	UNITS:	TITLE:	
		1:4	X	Harness, Flow Control/Power	
UNLESS OTHERWISE SPECIFIED TOLERANCE:				DRAWN BY: <i>Rayon Reiser</i>	
0-1" +/- .1" = 10-60" +/- .1" = .XX 1-5" +/- .25" = 60-120" +/- .2" = .XX 5-10" +/- .5" = 120" +/- .3" = .Z				CHECKED BY: <i>Scott Kauder</i>	
REV. DATE		NOC. No.		APPROVED BY: <i>Scott Kauder</i>	
R0	7/11/03	Released		SHEET No: 1 of 1	
				DWS No: C-405-0074	
Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed herein. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC.					