

A


B

C


D

AMP SuperSeal Connector
34 Pos. w/ Skts


Pos.	Color	Function
1	Plug	(+12v) V Out Switched
2	Plug	ISO CAN Ground
3	Plug	ISO CAN H
4	Plug	ISO CAN H
5	Plug	ISO CAN L
6	Plug	ISO CAN L
7	Plug	DIAG Ground
8	Plug	DIAG RX
9	Plug	DIAG TX
10	Plug	(+12v) V Out Switched
11	Plug	TJ CAN Ground
12	Wht	TJ CAN H
13	Plug	TJ CAN H
14	Grn	TJ CAN L
15	Plug	TJ CAN L
16	Yel	GNSS In RX
17	Brn	GNSS In TX
18	Blk	Ground
19	Plug	IGN Sense In
20	Plug	Reverse Sense In
21	Plug	Status Sense In
22	Plug	GNSS Ground
23	Plug	3rd Party GND (not available)
24	Plug	3rd Party RX (not available)
25	Plug	3rd Party TX (not available)
26	Red	(+12v) Volts In
27	Org	(+12v) Volts Out
28	Blu	Ground
29	Plug	Ground
30	Plug	Speed Out (GS)
31	Plug	Ground (GS)
32	Plug	Debug GND (not available)
33	Plug	Debug RX (not available)
34	Plug	Debug TX (not available)

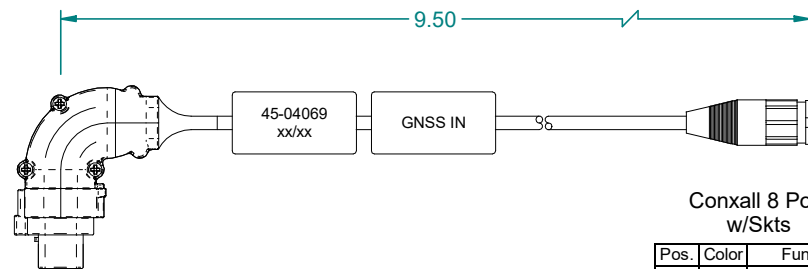

Front View



Pos.	Color	Function
1	Blk	Ground
2	Red	(+12v)Volts In
3	Grn	TJ CAN L
4	Blu	Ground
5	Org	(+12v) Volts Out
6	Wht	TJ CAN H
7	Yel	GNSS In RX
8	Brn	GNSS In TX



Front View

MATERIAL:		n/a			
FINISH:		n/a			
PROJECTION:		SCALE: UNITS:		TITLE:	
				Cable, Adapter, Matrix 908 to 570/840 Cable GNSS In	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		INCH: <u> X </u> METRIC: <u> 1:2 </u>		APPROVED BY:	
0-1" ±.1" <u> XX </u> 1-5" ±.25" <u> XX </u> 5-10" ±.5" <u> XX </u>		10-60" ±.1" <u> XX </u> 60-120" ±.2" <u> XX </u> 120" ±.3" <u> XX </u>		CHECKED BY:	
REV: 11/18/21		DATE: 11/18/21		DRAWN BY: <i>Bryan Reiser</i>	
NOC. No:		SHEET No:		1 of 1 C-45-04069	