

A


B

C

D

Deutsch
Plug 19 Pos.
w/Skts


| Pos. | Color | Function |
|------|-------|----------------------|
| 1 | Green | Open |
| 2 | Red | (+12v) FlowMeter |
| 3 | Black | Ground |
| 4 | White | Close |
| 5 | Blue | FlowMeter Sig. |
| 6 | Brown | Signal Red Lion |
| 7 | Green | Ground Red Lion |
| 8 | Red | (+12v) On/Off Valve |
| 9 | Black | Ground TACH |
| 10 | Red | (+12v) Control Valve |
| 11 | Red | (+12v) TACH |
| 12 | Black | Ground Battery |
| 13 | White | Signal TACH |
| 14 | Black | Ground Battery |
| 15 | White | Boom 1 |
| 16 | Green | Boom 2 |
| 17 | Plug | |
| 18 | Plug | |
| 19 | Plug | |

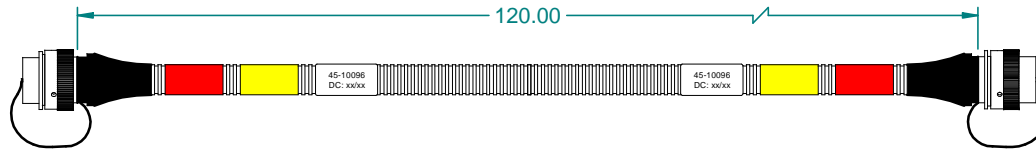

Deutsch
Receptacle 19 Pos.
w/Pins

| Pos. | Color | Function |
|------|-------|----------------------|
| 1 | Green | Open |
| 2 | Red | (+12v) FlowMeter |
| 3 | Black | Ground |
| 4 | White | Close |
| 5 | Blue | FlowMeter Sig. |
| 6 | Brown | Signal Red Lion |
| 7 | Green | Ground Red Lion |
| 8 | Red | (+12v) On/Off Valve |
| 9 | Black | Ground TACH |
| 10 | Red | (+12v) Control Valve |
| 11 | Red | (+12v) TACH |
| 12 | Black | Ground Battery |
| 13 | White | Signal TACH |
| 14 | Black | Ground Battery |
| 15 | White | Boom 1 |
| 16 | Green | Boom 2 |
| 17 | Plug | |
| 18 | Plug | |
| 19 | Plug | |

NOTE: 1.0 All Dimensions are displayed in "Inches"
Unless otherwise specified.

| | | | | | |
|--|--|---|--|---|--|
| MATERIAL: | | n/a | |  | |
| FINISH: | | n/a | | TITLE: Exactrix, Extension Harness 10' | |
| PROJECTION: | | SCALE: UNITS: X INCH METRIC: 1:4 | | DRAWN BY: Bryan Reeves | |
| UNLESS OTHERWISE SPECIFIED TOLERANCE: | | 0-1" +/- .1" 10-60" +/- .1" .XX 1-5" +/- .25" 60-120" +/- .2" .XXX 5-10" +/- .5" 120" +/- .3" .XX | | CHECKED BY: Amy Trudewer | |
| REV. DATE NOC. No | | SHEET No: 1 of 1 | | DWG No: C-45-10096 | |
| Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed herein. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC. | | | | | |