

A

B

C

D

1

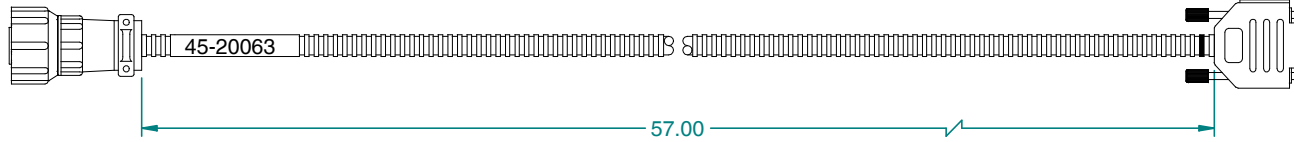
2

3

4

Framatome 8 Pin
Connector w/Collar
& 18-16ga Pins
Pin Out

- A-Wht 18/3 - TX
- B-Red 18/3 - RX
- C-Blk 18/3 - Gnd
- D-N.C.
- E-N.C.
- F-N.C.
- G-N.C.
- H-N.C.





DB9 Female 9 Socket
Connector & Black
Backshell
Pin Out

- 1-N.C.
- 2-Wht 18/3 - TX Ctrl
- 3-Red 18/3 - RX Ctrl
- 4-Red 1" - Jump to 6
- 5-Blk 18/3 - Gnd
- 6-Red 1" - Jump to 4
- 7-Red 1" - Jump to 8
- 8-Red 1" - Jump to 7
- 9-N.C.

Notes:

- 1.0 Cables: 18 & 20ga Stranded Wires
- 2.0 Conductors: Stranded Tinned Copper
- 3.0 Insulation: Color-Coded Polyvinylchloride

MATERIAL:		N/A																					
FINISH:		N/A																					
PROJECTION:		SCALE:	UNITS:	TITLE: 45984-15 Cable, Comm., 1.5m																			
		1:2	X	DRAWN BY: J.D. Martell																			
UNLESS OTHERWISE SPECIFIED TOLERANCE:		METRIC:		CHECKED BY: Amy Henderson																			
<table border="1"> <tr> <td>0-1" +/- .1"</td> <td>N/A</td> <td>10-60" +/- 1"</td> <td>N/A</td> <td>XXX</td> <td>N/A</td> </tr> <tr> <td>1-5" +/- .25"</td> <td>X</td> <td>60-120" +/- 2"</td> <td>.5</td> <td>XXX</td> <td>N/A</td> </tr> <tr> <td>5-10" +/- .5"</td> <td>N/A</td> <td>120" +/- 3"</td> <td>N/A</td> <td>∠</td> <td>N/A</td> </tr> </table>		0-1" +/- .1"	N/A	10-60" +/- 1"	N/A	XXX	N/A	1-5" +/- .25"	X	60-120" +/- 2"	.5	XXX	N/A	5-10" +/- .5"	N/A	120" +/- 3"	N/A	∠	N/A	APPROVED BY: Amy Henderson		SHEET No: 1 of 1	
0-1" +/- .1"	N/A	10-60" +/- 1"	N/A	XXX	N/A																		
1-5" +/- .25"	X	60-120" +/- 2"	.5	XXX	N/A																		
5-10" +/- .5"	N/A	120" +/- 3"	N/A	∠	N/A																		
REV.	DATE	DOC No	DWG No: C-45-20063																				
R0	4/29/03	010082																					

Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed herein. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC.