

A

B


C

D

1

Framatome 8 Pin  
Connector w/Collar  
& 18-16ga Pins  
Pin Out  
A-Wht 18/3 - TX  
B-Red 18/3 - RX  
C-Blk 18/3 - Gnd  
D-N.C.  
E-N.C.  
F-Brn 18ga - Gnd Prt  
G-Wht 18ga - +12V Prt  
H-N.C.

DB9 Female 9 Socket  
Connector & Black  
Backshell  
Pin Out  
1-N.C.  
2-Wht 18/3 - TX Ctrl  
3-Red 18/3 - RX Ctrl  
4-Red 1" - Jump to 6  
5-Blk 18/3 - Gnd  
6-Red 1" - Jump to 4  
7-Red 1" - Jump to 8  
8-Red 1" - Jump to 7  
9-N.C.

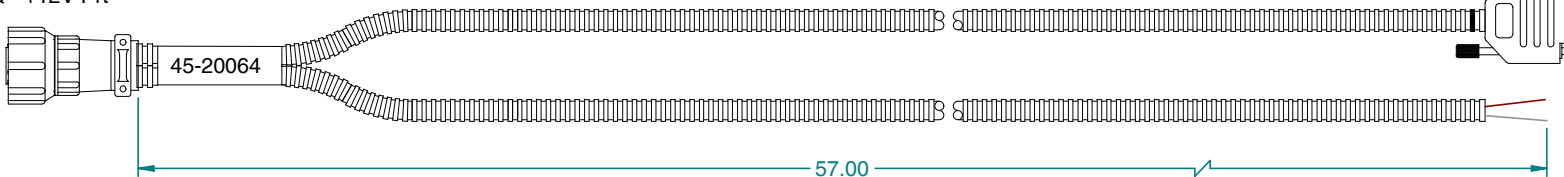

2


3

Stripped 18ga Wires  
Brn -Fram Conn Pin F - Gnd  
Wht-Fram Conn Pin G - +12V

Notes:

- 1.0 Cables: 18 & 20ga Stranded Wires
- 2.0 Conductors: Stranded Tinned Copper
- 3.0 Insulation: Color-Coded Polyvinylchloride

4

MATERIAL:		N/A			
FINISH:		N/A			
PROJECTION:		SCALE:	UNITS:	TITLE: 45987 Cable, Printer/Comm. w/ Pwr	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		1:2	X	DRAWN BY: J.D. Martie	
0-1" +/- .1"		N/A	10-60" +/- .1"	XXX	N/A
1-5" +/- .25"		X	60-120" +/- .2"	XXX	N/A
5-10" +/- .5"		N/A	120" +/- .3"	XXX	N/A
REV. DATE		NO. No		APPROVED BY: <i>Angie Stewart</i>	
R0	4/29/03	010082	SHEET No: 1 of 1		DWG No: C-45-20064
Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed herein. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC.					