

A

B

C

D

1

2

3

4

8-POS DEUTSCH

THROTTLE ADV. ON	BLU	5	4	RED	+12v
ACOT PUMP	BRN	6	3	PUR	GND
UNUSED	BLK	7	2	YEL	+12v ENGINE RUN
UNUSED	WHT	8	1	GRN	SCOT PUMP


2-POS PACKARD SHROUD
 A BLK FLEX CONTROLLER
 B RED WETBOOM PWM VALVE

FROM CONSOLE

A	ORG	+12v
B	BRN	GND
C	GRN	OPEN
D	WHT	CLOSE
E	BLU	APER
F		PLUG

TO VALVE

A	ORG	+12v
B	BRN	GND
C	RED	OPEN
D	BLK	CLOSE
E	BLU	APER
F		PLUG

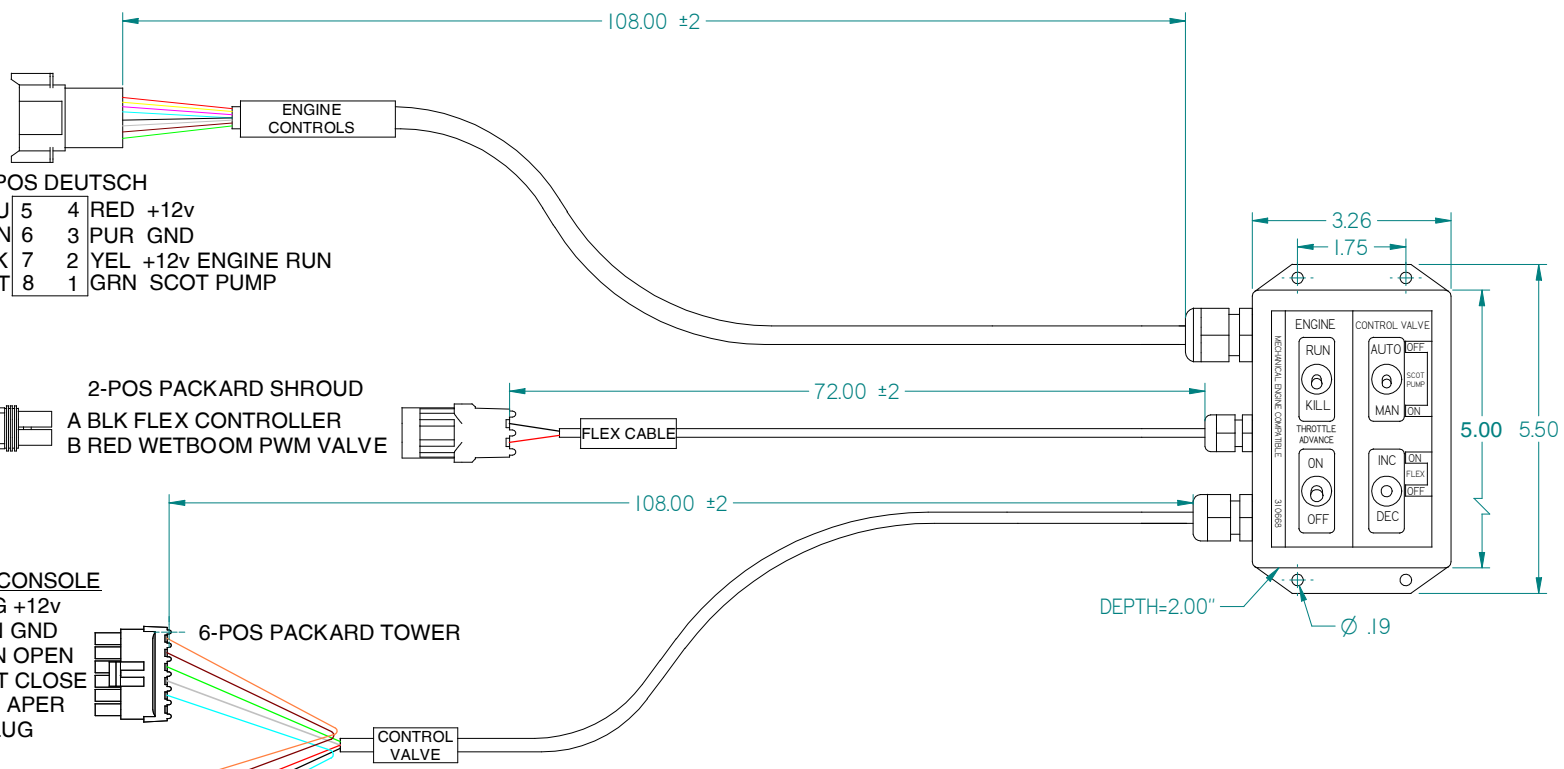

NOTES:
 1.0 MATERIALS:
 BOX - MATERIAL: AB S, BLACK
 FINISH: TEXTURED
 STRAIN RELIEFS-NYLON, WATER TIGHT
 2.0 CABLES:
 ENGINE CONTROLS CABLE - 8 COND. 18GA.
 FLEX CABLE - 2 COND. 18GA.
 CONTROL VALVE CABLE - 4 COND. 18GA
 DESCRIPTION:
 CONDUCTORS: STRANDED TINNED COPPER
 INSULATION: COLOR-CODED POLYVINY LCHLORIDE
 CONSTRUCTION: CONDUCTORS ARE CABLED
 JACKET: CHROME POLYVINY LCHORIDE
 CHARACTERISTIC S:
 TEMPERATURE RANGE: 105 deg. C
 VOLTAGE RATING: 300 VOLTS
 UL STYLE 2464

MATERIAL:		N/A		MID-TECH MIDWEST TECHNOLOGIES INC.	
FINISH:		N/A		TITLE: SWITCHBOX, TYLER LOAD "B"	
PROJECTION:		SCALE: UNITS: X 1:2		DRAWN BY: DAVE DANNER	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		METRIC: X XX .02		CHECKED BY: Amy Newburn	
R1	12/14/99	99033-2	0-1" ±.1"	10-60" ±.1"	3XX .02
R0	12/03/98	97352-2	1-5" ±.25"	60-120" ±.2"	3XX .02
REV.	DATE	NOC. No	5-10" ±.5"	120" ±.3"	3XX .02
MIDWEST TECHNOLOGIES INC. CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL DISCLOSED HEREON. THIS DOCUMENT IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTEREST OF MIDWEST TECHNOLOGIES INC.					