

A

B

C


D

1

2


3

4

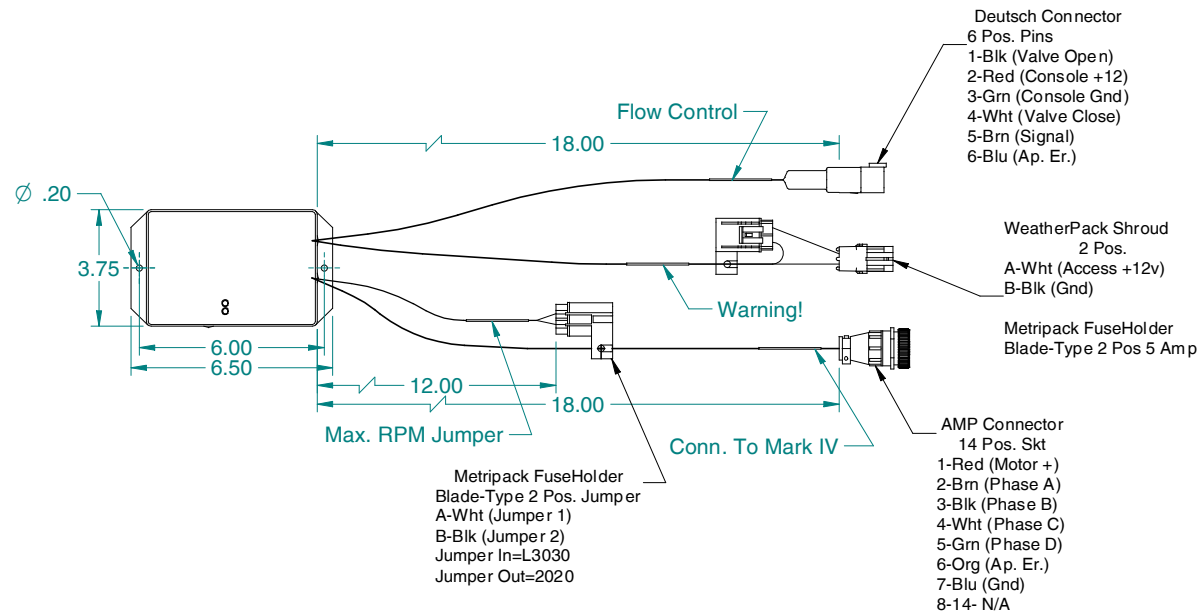

## NOTES:

- 1.0 Materials:  
Box: ABS 94-VO
- 2.0 Cables:  
Flow Control: 18ga/7 Cond.  
Ignition Power: 16ga/2 Cond.  
Max R.P.M. Jumper: 18ga/2 Cond.  
Connect to MarkIV: 18ga/7 Cond.
- 3.0 Description:  
Conductor: Stranded Tinned Copper  
Insulation: Color-Coded Polyvinylchloride  
Construction: Conductors are Cabled  
Jacket: Chrome Polyvinylchloride  
Characteristics:  
Temperature Range: 105deg. C  
Voltage Rating: 300 Volts  
UL Style 2464

MATERIAL:		See Notes			
FINISH:		See Notes			
PROJECTION:		SCALE:	UNITS:	TITLE: Interface, Driver Mark IV Sttwr 1.02	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		1:4	X	DRAWN BY: <i>Rayon Risher</i>	
R1	6/26/03	10248		CHECKED BY: <i>Amy Newhart</i>	
R0	1/2/01	Released		APPROVED BY: <i>Dwaine Stewart</i>	
REV.	DATE	DOC. No.		SHEET No:	DWG No:
				1 of 1	C-78-05032
Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed hereon. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC.					