


A

B





C

D

ORANGE

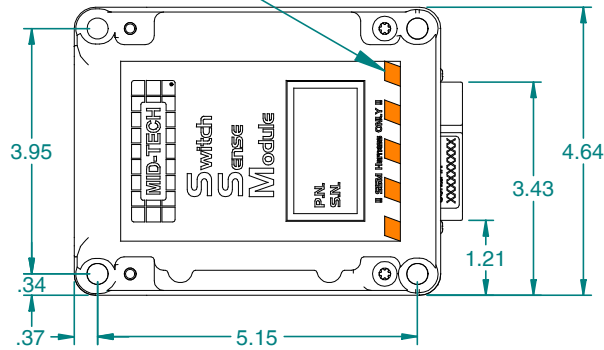

Pin	Function	Pin	Function
A1	CAN +V Out	F1	Boom Sense 13
A2	CAN Hi	F2	Boom Sense 12
A3	CAN Lo	F3	Boom Sense 11
B1	CAN Ground	G1	Boom Sense 10
B2	CAN Shield	G2	Boom Sense 9
B3	ptc2 +V	G3	Boom Sense 8
C1	ptc2 +V	H1	Boom Sense 7
C2	ptc2 +V	H2	Boom Sense 6
C3	Boom Sense 20	H3	Boom Sense 5
D1	Boom Sense 19	J1	Boom Sense 4
D2	Boom Sense 18	J2	Boom Sense 3
D3	Boom Sense 17	J3	Boom Sense 2
E1	Boom Sense 16	K1	Boom Sense 1
E2	Boom Sense 15	K2	Implement Status
E3	Boom Sense 14	K3	GSO

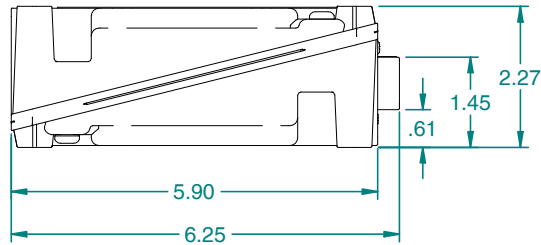

1:4

Notes:

- 1.0 All Dimensions Displayed in "Inches" Unless Otherwise Specified.
- 2.0 Form-Filled Seal. Do Not Open. Warranty Will Be Voided.

LED	LED Status	Message Or Meaning
CAN	Flashing	CAN communication in progress
PRG	Flashing	CAN module is functioning
PRG	Rapid Flashing	CAN module receiving software update
SW	ON/OFF	Status changes each time a boom switch is activated
MAG	N/A	Not Used
TXD	N/A	For production use only

MATERIAL:		N/A			
FINISH:		N/A			
PROJECTION:		SCALE: UNITS: INCH: X METRIC: X		TITLE: Module, SSM w/L6K Software	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		1:2		DRAWN BY: J.D. Martin	
R0 2/19/03 001070		0-1" +/- .1" 10-60" +/- 1" 3XX		CHECKED BY: Amy Robinson	
REV. DATE NOC. No		1-5" +/- .25" 60-120" +/- 2" 3XX		APPROVED BY: Scott Leander	
		5-10" +/- .5" 120" +/- 3" Z		SHEET No: 1 of 1 DWS No:	
Midwest Technologies IL, LLC. Claims proprietary right in the material disclosed herein. This document is not to be used in any way detrimental to the interest of Midwest Technologies IL, LLC.					