
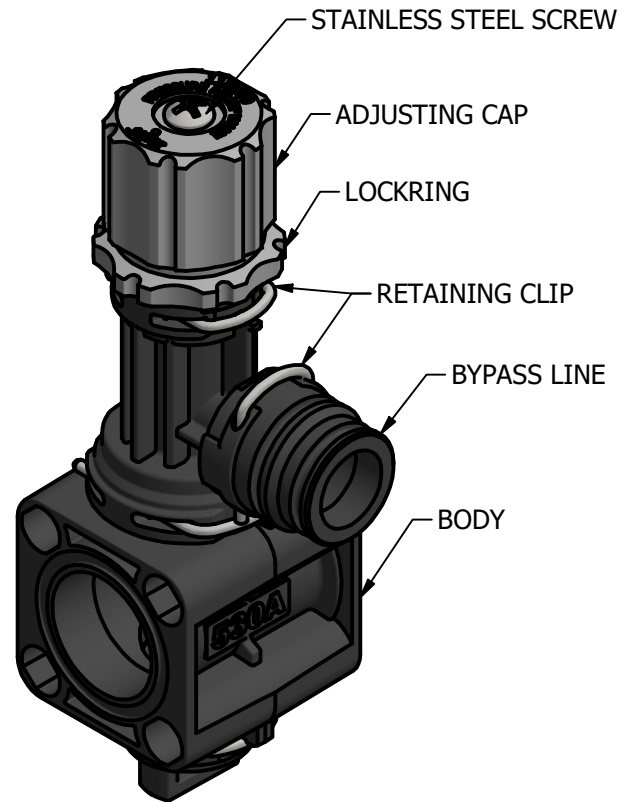


*DIMENSIONS REPRESENT FULLY-CLOSED POSITION

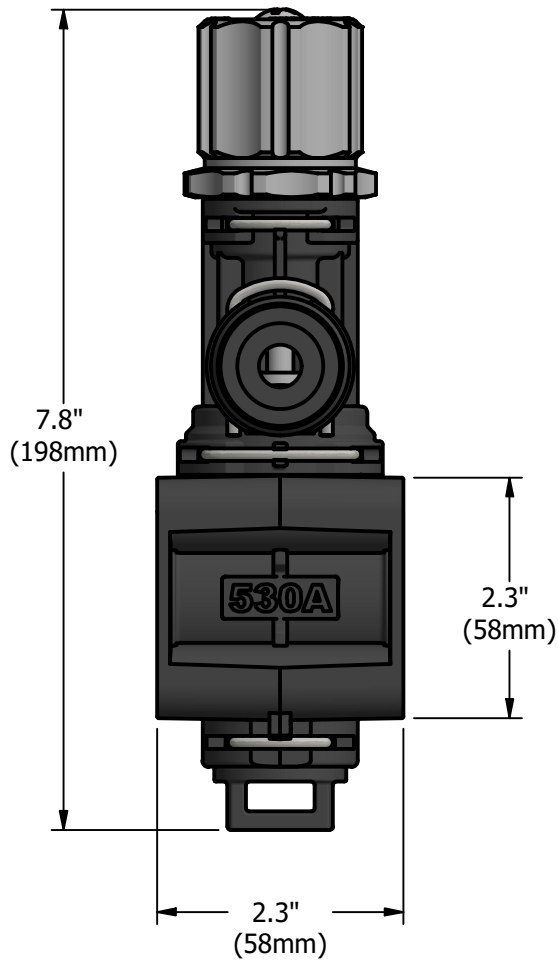

INDIVIDUAL PARTS NOT AVAILABLE FOR SALE

SPECIFICATIONS:

- MAXIMUM PRESSURE RATING: 290 PSI (20 BAR)
- WETTED MATERIALS: POLYPROPYLENE, NYLON, STAINLESS STEEL, FKM

FLOW RATE WITH PRESSURE DROP (FULLY OPEN POSITION)			
5 PSI	10 PSI	20 PSI	40 PSI
5.5 GPM	7.7 GPM	10.9 GPM	15.5 GPM

FLOW RATE WITH PRESSURE DROP (FULLY OPEN POSITION)			
0.3 BAR	0.7 BAR	2.1 BAR	2.8 BAR
20.8 L/MIN	29.1 L/MIN	41.3 L/MIN	58.7 L/MIN

FEATURES INCLUDE:

- MANUALLY CONTROL SYSTEM PRESSURE
- SPRING LOADED PLUNGER PROTECTS SYSTEM FROM LARGE PRESSURE SPIKES BY RELIEVING EXCESS FLOW
- DESIGNED FOR USE WITH 530AM AND 530AEC MANIFOLDS
- GRAY KNOB TO INDICATE PRESSURE RELIEF FUNCTION
- STAINLESS STEEL STEM PROVIDES EXCELLENT DURABILITY AND CHEMICAL RESISTANCE
- OUTLET CONNECTIONS AVAILABLE IN QUICK CONNECT HOSE BARBS; REFER TO PL45529
- INLET OPTIONS: LARGE QUICK CONNECT, 50-SERIES OR 75-SERIES FLANGE

DESCRIPTION:

118560
PRESSURE RELIEF
VALVE ASSEMBLY



REVISION NO.

1

REFERENCE:

8/5/24

Data Sheet No.

DS118560

SHEET:

1 OF 1

DWG SIZE:

A