
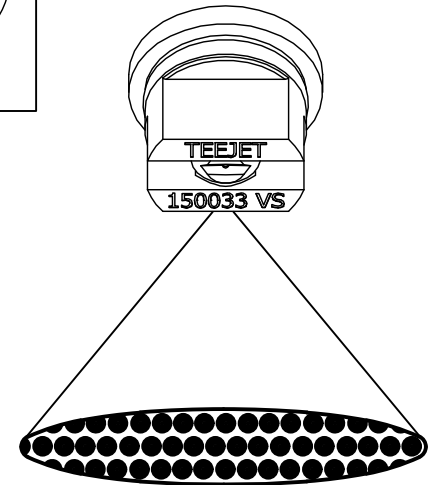


TeeJet®

LOW CAPACITY FLAT FAN SPRAY TIPS
WITH *Viso Flo*® COLOR CODING

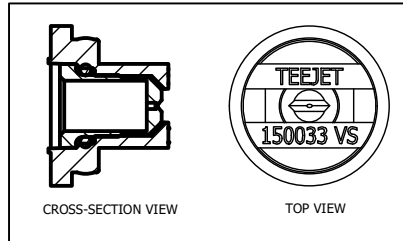

TIP PART NUMBER	DROPLET SIZE			
	30 PSI	40 PSI	50 PSI	60 PSI
TP150033VS	M	F	F	VF
TP150050VS	M	M	F	F
TP250025VS	F	F	VF	VF
TP250050VS	M	F	F	F
TP400050VS	F	F	F	VF

SPRAY ANGLE AT 40 PSI	TIP PART NUMBER	STRAINER SCREEN SIZE	CAPACITY GALLONS PER MINUTE AT PRESSURE PSI			
			30 PSI	40 PSI	50 PSI	60 PSI
15°	TP150033VS	200	0.030	0.033	0.037	0.040
	TP150050VS	200	0.043	0.050	0.056	0.061
	TP150067VS	100	0.058	0.067	0.075	0.082
25°	TP250025VS	200	0.022	0.025	0.028	0.031
	TP250050VS	200	0.043	0.050	0.056	0.061
40°	TP400050VS	200	0.043	0.050	0.056	0.061

- TAPERED SPRAY PATTERN FOR BROADCAST APPLICATIONS
- DESIGNED FOR PRECISE APPLICATION AND SUPERIOR COVERAGE IN TARGET SPRAYING APPLICATIONS
- OPTIMIZED FOR APPLICATIONS THAT MAY INCLUDE NARROW SPACING, LOW BOOM HEIGHTS, AND OTHER TARGET SPRAY USES WHERE NARROW ANGLES ARE PREFERRED
- NARROW SPRAY ANGLES DELIVER CONCENTRATED COVERAGE ON THE INTENDED TARGET, MINIMIZING OVER SPRAY AND REDUCING WASTE ON NON-TARGET AREAS
- DIFFERENT SPRAY ANGLE CAPACITIES AVAILABLE -- 15°, 25°, 30°, 40°, 50°, 65°
- SUGGESTED SPRAY PRESSURE RANGE: 30-60 PSI (2-4 BAR)
- AUTOMATIC ALIGNMENT WITH 114441A-*-CELR QUICK TEEJET CAP AND GASKET WITH VISIFLO COLOR CODING
- COMPATIBLE WITH BRASS TEEJET TEE BODIES AND CP1325 CAP
- STAINLESS STEEL INSERT WITH CELCON BODY

DESCRIPTION:

LOW CAPACITY
TP VISIFLO®
SPRAY TIPS

REVISION NO.

1

REFERENCE:

10/13/25

Parts List No.

DS21103

SHEET: 1 OF 1

DWG SIZE:

A