


Tip Color VisiFlo	Tip No. Strainer Screen Size	Liquid Pressure (psi)	Drop Size Classi- fication	Capacity 1 Nozzle (GPM)	Capacity 1 Nozzle (oz/min)	Gallons Per Acre 20 Inch Spacing				Gallons Per Acre 30 Inch Spacing			
						5	6	7	8	5	6	7	8
						mph	mph	mph	mph	mph	mph	mph	mph
YELLOW	TTJ60-11002VP (100 Mesh)	20	C	0.14	18	8.3	6.9	5.9	5.2	5.5	4.6	4.0	3.5
		30	C	0.17	22	10.1	8.4	7.2	6.3	6.7	5.6	4.8	4.2
		40	M	0.20	26	11.9	9.9	8.5	7.4	7.9	6.6	5.7	5.0
		50	M	0.22	28	13.1	10.9	8.9	8.2	8.7	7.3	6.2	5.4
		60	M	0.24	31	14.3	11.9	10.0	8.9	9.5	7.9	6.8	5.9
		75	M	0.27	35	16.0	13.4	11.5	10.0	10.7	8.9	7.6	6.7
90	M	0.30	38	17.8	14.9	12.7	11.1	11.9	9.9	8.5	7.4		
VIOLET	TTJ60-110025VP (100 Mesh)	20	VC	0.18	23	10.7	8.9	7.6	6.7	7.1	5.9	5.1	4.5
		30	C	0.22	28	13.1	10.9	9.3	8.2	8.7	7.3	6.2	5.4
		40	C	0.25	32	14.9	12.4	10.6	9.3	9.9	8.3	7.1	6.2
		50	M	0.28	36	16.6	13.9	11.9	10.4	11.1	9.2	7.9	6.9
		60	M	0.31	40	18.4	15.3	13.2	11.5	12.3	10.2	8.8	7.7
		75	M	0.34	44	20	16.8	14.5	12.6	13.5	11.2	9.6	8.4
90	M	0.38	49	23	18.8	16.1	14.1	15.0	12.5	10.7	9.4		
BLUE	TTJ60-11003VP (100 Mesh)	20	VC	0.21	27	12.5	10.4	8.9	7.8	8.3	6.9	5.9	5.2
		30	C	0.26	33	15.4	12.9	11.0	9.7	10.3	8.6	7.4	6.4
		40	C	0.30	38	17.8	14.9	12.7	11.1	11.9	9.9	8.5	7.4
		50	M	0.34	44	20	16.8	14.4	12.6	13.5	11.2	9.6	8.4
		60	M	0.37	47	22	18.3	15.7	13.7	14.7	12.2	10.5	9.2
		75	M	0.41	52	24	20	17.4	15.2	16.2	13.5	11.6	10.1
90	M	0.45	58	27	22	19.1	16.7	17.8	14.9	12.7	11.1		
RED	TTJ60-11004VP (50 Mesh)	20	VC	0.28	36	16.6	13.9	11.9	10.4	11.1	9.2	7.9	6.9
		30	C	0.35	45	21	17.3	14.9	13.0	13.9	11.6	9.9	8.7
		40	C	0.40	51	24	19.8	17.0	14.9	15.8	13.2	11.3	9.9
		50	M	0.45	58	27	22	19.1	16.7	17.8	14.9	12.7	11.1
		60	M	0.49	63	29	24	21	18.2	19.4	16.2	13.9	12.1
		75	M	0.55	70	33	27	23	20	22	18.2	15.6	13.6
90	M	0.60	77	36	30	25	22	24	19.8	17.0	14.9		
BROWN	TTJ60-11005VP (50 Mesh)	20	VC	0.35	45	21	17.3	14.9	13.0	13.9	11.6	9.9	8.7
		30	C	0.43	55	26	21	18.2	16.0	17.0	14.2	12.2	10.6
		40	C	0.50	64	30	25	21	18.6	19.8	16.5	14.1	12.4
		50	C	0.56	72	33	28	24	21	22	18.5	15.8	13.9
		60	M	0.61	78	36	30	26	23	24	20	17.3	15.1
		75	M	0.68	87	40	34	29	25	27	22	19.2	16.8
90	M	0.75	96	45	37	32	28	30	25	21	18.6		
GRAY	TTJ60-11006VP (50 Mesh)	20	XC	0.42	54	25	21	17.8	15.6	16.6	13.9	11.9	10.4
		30	C	0.52	67	31	26	22	19.3	21	17.2	14.7	12.9
		40	C	0.60	77	36	30	25	22	24	19.8	17.0	14.9
		50	C	0.67	86	40	33	28	25	27	22	19.0	16.6
		60	M	0.73	93	43	36	31	27	29	24	21	18.1
		75	M	0.82	105	49	41	35	30	32	27	23	20
90	M	0.90	115	53	45	38	33	36	30	25	22		
WHITE	TTJ60-11008VP (50 Mesh)	20	VC	0.57	73	34	28	24	21	23	18.8	16.1	14.1
		30	VC	0.69	88	41	34	29	26	27	23	19.5	17.1
		40	C	0.80	102	48	40	34	30	32	26	23	19.8
		50	C	0.89	114	53	44	38	33	35	29	25	22
		60	C	0.98	125	73	58	49	42	39	32	28	24
		75	C	1.10	141	65	54	47	41	44	36	31	27
90	M	1.20	154	71	59	51	45	48	40	34	30		
LIGHT BLUE	TTJ60-11010VP (50 Mesh)	20	XC	0.71	91	42	35	30	26	28	23	20	17.6
		30	VC	0.87	111	52	43	37	32	34	29	25	22
		40	VC	1.00	128	59	50	42	37	40	33	28	25
		50	VC	1.12	143	67	55	48	42	44	37	32	28
		60	C	1.22	156	72	60	52	45	48	40	35	30
		75	C	1.37	175	81	68	58	51	54	45	39	34
90	C	1.50	192	89	74	64	56	59	50	42	37		

TABULATION BASED ON SPRAYING WATER AT 70° F.

## Turbo TwinJet

POLYMER FLAT SPRAY TIP  
WITH **VisiFlo** COLOR CODING

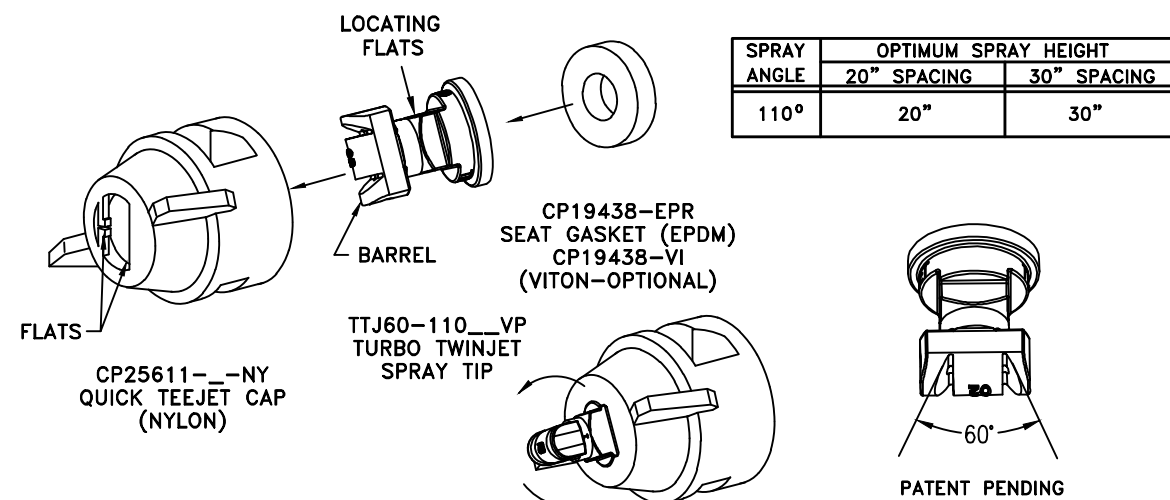


### FEATURES:

- TIP PRODUCES DUAL, TAPERED EDGE, WIDE ANGLE, FLAT SPRAY PATTERN FOR UNIFORM COVERAGE IN BROADCAST SPRAYING.
- DUAL ANGLED SPRAY PATTERNS HELP TO PENETRATE THE CROP CANOPY AND PROVIDE THOROUGH LEAF COVERAGE.
- LARGE, FREE PASSAGES TO MINIMIZE CLOGGING.
- ALL ACETAL CONSTRUCTION FOR EXCELLENT CHEMICAL AND WEAR RESISTANCE.
- LARGER DROPLET SIZE FOR IMPROVED DRIFT CONTROL.
- AUTOMATIC SPRAY ALIGNMENT WITH 25612-\_-NYR QUICK TEEJET CAP & GASKET.
- TO INSTALL - ALIGN TIP BARREL WITH CAP FLATS AND PRESS IN UNTIL TIP BOTTOMS OUT. ROTATE TIP 90° UNTIL TIP FLATS ARE PARALLEL WITH CAP FLATS. PRESS TIP UNTIL IT BOTTOMS OUT AGAIN.
- SUGGESTED SPRAY PRESSURE RANGE: 20-90 PSI.

### TYPICAL APPLICATIONS:

- BEST FOR PRE-EMERGE SURFACE APPLIED HERBICIDES - MINIMUM SPRAY PRESSURE OF 15 PSI.
- BEST FOR POST-EMERGE CONTACT HERBICIDES - TYPICAL PRESSURES OF 40 PSI AND HIGHER.
- EXCELLENT FOR FUNGICIDE APPLICATION.

DESCRIPTION:  
GALLONS PER ACRE TABULATION  
FOR TTJ60-110\_\_VP TURBO TWINJET®  
DUAL ORIFICE FLAT SPRAY TIP



**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, IL 60187-7901

Rev. No. 2

Ref. 3/12/2015

DATA SHEET

**55220**

SHEET OF