



NOTES

- DESIGNED FOR TEEJET® 430 BALL VALVE AND e-CHEMSAVER ELECTRIC SOLENOID VALVE
- OVERMOLDED END PLUG AND RUBBER GASKET PROVIDE EXCELLENT WATER TIGHT SEALS
- TWO WIRE AND THREE WIRE CONFIGURATIONS; THREE WIRE IS USED FOR EC STYLE MOTORS, TWO WIRE IS USED FOR E STYLE MOTORS / e-CHEMSAVER
- EC STYLE MOTORS USE A SINGLE POLE, SINGLE THROW SWITCH (RED IS HOT, BLACK IS GROUND, AND WHITE IS SWITCHING)
- E STYLE MOTORS USE A DOUBLE POLE, DOUBLE THROW SWITCH (RED AND BLACK- REVERSE POLARITY)


ORDERING INFORMATION

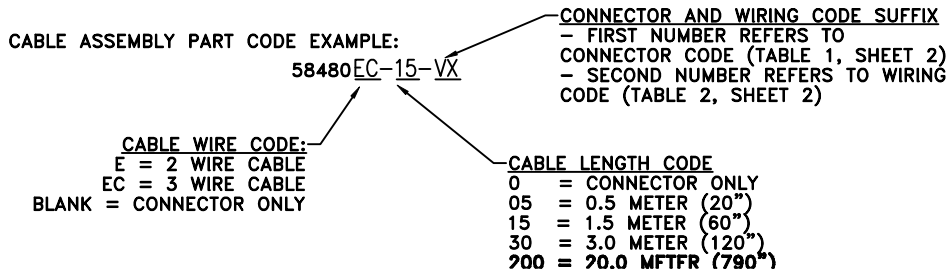

CONNECTION DIAGRAM

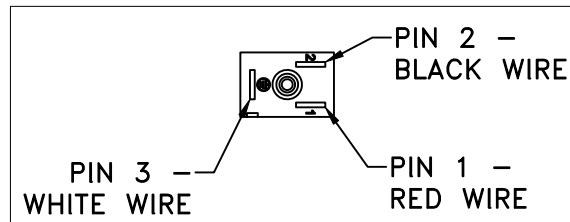

MINI-DIN CABLE

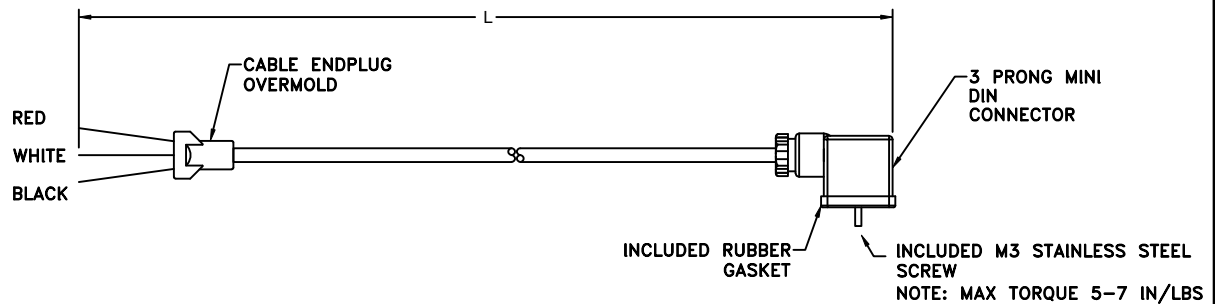

DESCRIPTION:
58480 MINI-DIN FOR
e-CHEMSAVER™ AND 430
ELECTRIC BALL VALVE



Spraying Systems Co.®

Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No. 2

Ref. 6/21/2010

DATA SHEET
DS58480
SHEET 1 OF 2