

**NOTES**

- DESIGNED FOR TEEJET® B-STYLE BALL VALVES AND 540 PLUNGER VALVES
- OVERMOLDED END PLUG AND FEMALE METRI-PACK CONNECTOR PROVIDE EXCELLENT WATER TIGHT SEALS
- TWO WIRE AND THREE WIRE CONFIGURATION; THREE WIRE IS USED FOR E AND EC STYLE MOTORS, TWO WIRE IS USED FOR REGULATING MOTORS
- EC STYLE MOTORS USE A SINGLE POLE, SINGLE THROW SWITCH (RED IS HOT, BLACK IS GROUND, AND WHITE IS SWITCHING)
- E STYLE MOTORS USE A DOUBLE POLE, DOUBLE THROW SWITCH (RED AND BLACK - REVERSE POLARITY)
- R OR REGULATING STYLE MOTORS USE A DOUBLE POLE, DOUBLE THROW SWITCH (RED AND BLACK - REVERSE POLARITY)

**ORDERING INFORMATION**

CABLE ASSEMBLY PART CODE EXAMPLE:

**98546EC-05-VX**

CABLE WIRE CODE:

EC = 3 WIRE CABLE

\*(USED ON ALL SHUTOFF MOTORS)

R = 2 WIRE CABLE

\*(USED ON ALL REGULATING MOTORS)

CONNECTOR AND WIRING CODE SUFFIX

• FIRST LETTER REFERS TO CONNECTOR CODE

• SECOND LETTER REFERS TO WIRING CODE

\*(REFERENCE CATALOG 51A pg. 117)


CABLE LENGTH CODE:

05 = 0.5 METER (20")

15 = 1.5 METER (60")


30 = 3.0 METER (120")

60 = 6.0 METER (240")

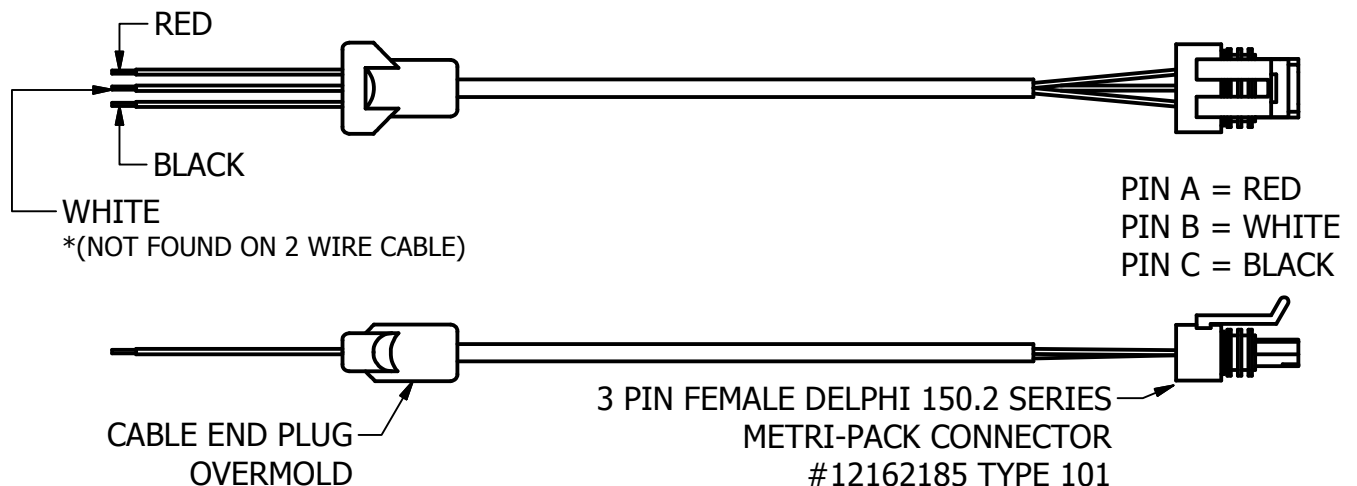

**DESCRIPTION:**

98546 METRI-PACK CABLE FOR B-STYLE ELECTRIC BALL VALVE AND 540 PLUNGER VALVE



**Spraying Systems Co.**®

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, IL 60189-7900

REVISION NO.

DATA SHEET

REFERENCE:

**DS98546**

SHEET:

DWG SIZE:

A