


C118570 THROTTLING VALVES ARE GENERALLY USED FOR METERING FLOW ON SYSTEMS EQUIPPED WITH CENTRIFUGAL PUMPS, OR OTHER APPLICATIONS WHERE METERING FLOW IS REQUIRED.

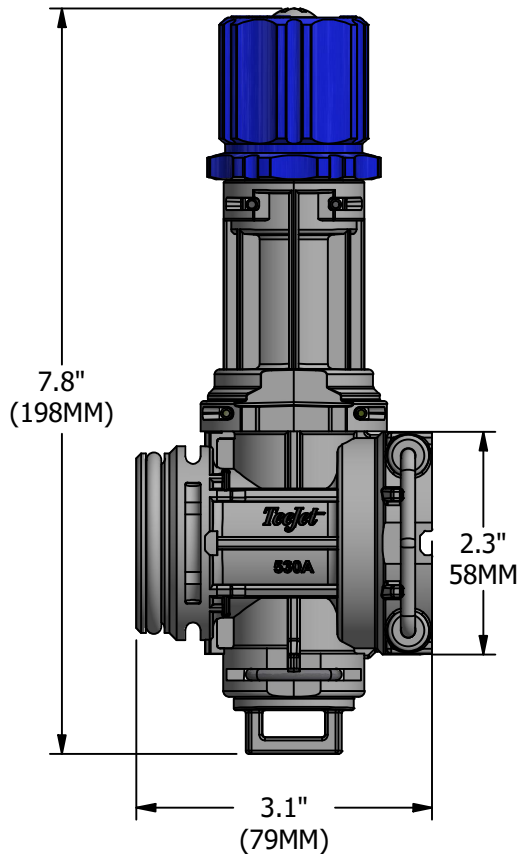

*PLEASE NOTE DIMENSIONS ARE IN THE FULLY CLOSED POSITION

HOW TO ORDER:

- C118570


INDIVIDUAL PARTS NOT AVAILABLE FOR SALE

SPECIFICATIONS:

- MAXIMUM PRESSURE RATING: 290 PSI (20 BAR)
- WETTED MATERIALS: POLYPROPYLENE, NYLON STAINLESS STEEL, FKM

FEATURES INCLUDE:

- MODULAR CLIPPED BODY ALLOWS FOR TOOL FREE ASSEMBLY OF VARIOUS ACCESSORIES AND MANIFOLD COMPONENTS
- MANUAL CONTROL OF SYSTEM PRESSURE
- DESIGNED FOR USE WITH C530A MANIFOLDS
- STAINLESS STEEL STEM PROVIDES EXCELLENT DURABILITY AND CHEMICAL RESISTANCE
- FOR INLET OPTIONS, REFER TO PL191016
- FOR QUICK CONNECT OUTLET OPTIONS, REFER TO PL45529

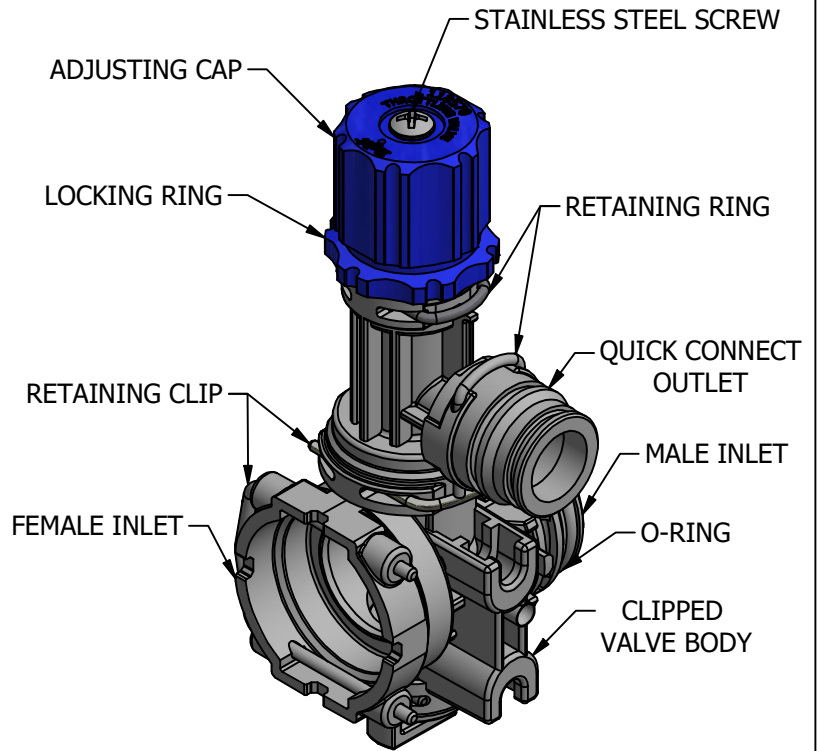

FLOW RATE WITH PRESSURE DROP (FULLY OPEN POSITION)			
5 PSI	10 PSI	20 PSI	40 PSI
6.7 GPM	9.4 GPM	13.3 GPM	18.8 GPM

FLOW RATE WITH PRESSURE DROP (FULLY OPEN POSITION)			
0.3 BAR	0.7 BAR	2.1 BAR	2.8 BAR
25.4 L/MIN	35.6 L/MIN	50.3 L/MIN	71.2 L/MIN

DESCRIPTION:

C118570 CLIPPED THROTTLING VALVE



REVISION NO.	1	Data Sheet No.	
REFERENCE:	11/6/2024	DSC118570	
SHEET:	1 OF 1	DWG SIZE:	A