
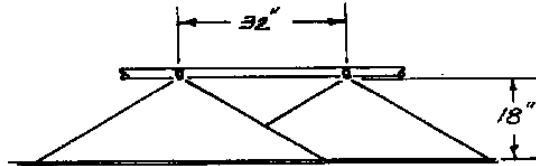


Material - Stainless Steel

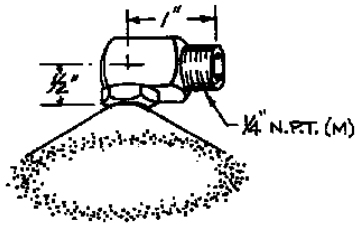

Wide Angle Hollow Cone Spray

Nozzle No.	Pressure PSI	Capacity GPM	GALLONS PER ACRE			
			Nozzle Spacing - 32"			
			3 MPH	4 MPH	5 MPH	6 MPH
1/2B-SS5-5W	10	.50	31	23	19	16
	15	.61	38	28	23	19
	20	.71	44	33	26	22
	25	.79	49	37	29	24
	30	.86	54	40	32	27
	35	.94	58	43	35	29
	40	1.0	62	46	37	31
1/2B-SS5-15W	10	.77	48	36	29	24
	15	.94	58	44	35	29
	20	1.1	67	51	40	34
	25	1.2	75	56	45	38
	30	1.3	83	62	50	41
	35	1.4	89	67	53	45
	40	1.5	95	71	57	48

Tabulation is based on spraying water at temperature of 70° F.

**DESCRIPTION:**

GALLONS PER ACRE  
USING "WIDE SPRAY"  
WHIRLJET NOZZLES  
(32" SPACING)



**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

**15053**

Ref.

SHEET OF